

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

STATE OF MICHIGAN
COUNTY OF CRAWFORD

FILED FOR RECORD THIS
6th DAY OF June 1990
9:30 am, in LIBER 2
PAGE 347.
Elizabeth Wilkerson
Register of Deeds

For corners in

Crawford <small>(County)</small>	Located In:	Corner Code //
1. Public Land Survey	T 27NR 1W	F-13 G-7
	T R	
	T R	
	T R	
2. Property Controlling in Section	S T R	
	S T R	
3. Miscellaneous Property in Sec.	S T R	
	S T R	

Register of Deeds Stamp & File Number

1. Lot No. _____ Recorded Plat _____
2. Private Claims _____

Norman C. Caldwell in a field survey on March 19 90


to hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules theretofore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law, established, re-established, monumented, re-monumented, recovered, found as expressed below.

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

	A	B	C	D	E	F	G	H	I	J	K	L	M
2	6	5	4	3	2	1							
3													
4	7	8	9	10	11	12							
5													
6	18	17	16	15	14	13							
7													
8	19	20	21	22	23	24							
9													
10	30	29	28	27	26	25							
11													
12	31	32	33	34	35	36							
13													

1. Description of original monument and accessories and/or subsequent restoration:

- F-13) Post set by Mullett in 1839.
Tamarack 6" N86°E .30 (19.80')
Pine 4" N05°W .13 (8.58')
- G-7) Post set by Pettibone, July 17, 1852.
Y. Pine 24" N15°E .40 (26.40')
Y. Pine 20" N52°W .32 (21.12')

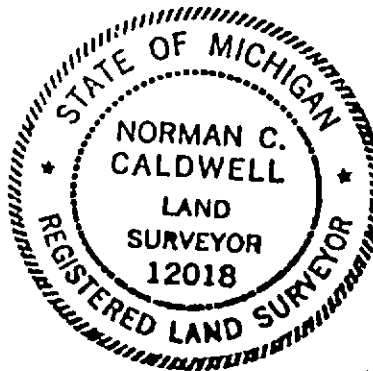

2. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

- F-13) LaGuire fnd. a post & two Tamarack stumps, 1934.
His distance was 38.95 chains from the SE sec. cor.
This area is now in flood waters & inaccessible
- G-7) LaGuire placed pipe & conc. mon. at an existing post & verified by both orig. BTs.
N. Parker, LS 16939 fnd. mon. Nov. 3, 1976 & rec. in L 2, pg 102.
K.J. Ostling, LS 10068 fnd. mon. Sep. 19, 1978 & replaced w/DNR mon.
S44°W 41.85' 14" Oak
S09°E 57.7' 20" R. Pine
rec. in L 2, pg 193

3. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

- F-13) Standard 1/4 cor. Sec. 33, (G-7) Sec. cor. 15,16,21&22, T27N-R1W
T27N-R1W
Fnd. DNR pipe & cap. And is accepted as a careful & faithful perpetuation of the position of the orig. corner.
North 1' Carsonite Witness Post
S14°E 57.5' 21" R. Pine (R)
S40°W 42.2' 17" Oak (R)
S70°W 93.2' 10" R. Pine
S68°E 92.4' 9" Cedar
East 10.9' anchor post
- This area is now in flood waters & inaccessible

Signed by *Norman C. Caldwell*

Date April 26, 1990

Surveyor's Michigan License No. 12018