

LAND CORNER RECORDATION CERTIFICATE  
Filing Requirement of Act 74, Mich. P.A. 1970

STATE OF MICHIGAN  
COUNTY OF CRAWFORD

FILED FOR RECORD THIS  
6th DAY OF June, 1990 AT  
9:30 AM, IN LIBER 2  
PAGE 356.  
*[Signature]*  
Register of Deeds

or corners in

Crawford  
(County)

Located In:

Corner Code //

Public Land Survey	T	27NR	1W	H-13
	T	R		
	T	R		
	T	R		
Property Controlling in Section	S	T	R	
Miscellaneous	S	T	R	
Property in Sec.	S	T	R	

Register of Deeds Stamp & File Number

Lot No. Recorded Plat  
Private Claims

	A	B	C	D	E	F	G	H	I	J	K	L	M
2	6	5	4	3	2	1							
3													
4	7	8	9	10	11	12							
5													
6	18	17	16	15	14	13							
7													
8	19	20	21	22	23	24							
9													
10	30	29	28	27	26	25							
11													
12	31	32	33	34	35	36							
13													

Norman C. Caldwell field survey on March 19 90  
I hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law, established, re-established, monumented, re-monumented, recovered, found as expressed below.


NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

Description of original monument and accessories and/or subsequent restoration:

(H-13) Pine 8" diameter for quarter post.

Description of corner evidence found and/or method applied in restoring or reestablishing corner:

(H-13) LaGuire, 1934, placed pipe & conc. block-by proportion.

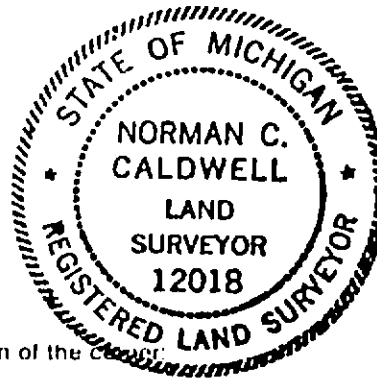

Description of monument for corner and accessories established to perpetuate locating the position of the corner:

(H-13) Stand, 1/4 cor. Sec. 34, T27N-R1W

Fnd. DNR pipe & cap in CL E-W fireline. Accepted as a careful and faithful reestablishment of the position of the orig. corner.  
South 11' Carsonite Witness Post South 7.3' 1 1/4" pipe - origin unknown. Believe this to be a Schaaf corn., removed from prop. pos. in fire-line & turned upside-down.  
S45°E 23.7' 14" Oak (old BT)  
S30°E 34.3' 5" N. Pine  
S45°W 39.2' 5" W. Pine  
N15°E 16.3' 14" Oak (old BT)

Surveyed by *[Signature]* Date April 26, 1990  
Surveyor's Michigan License No. 12018