

LIBER

2 PAGE 381

LAND CORNER RECORDATION CERTIFICATE  
Filing Requirement of Act 74, Mich. P.A. 1970

STATE OF MICHIGAN  
COUNTY OF CRAWFORD

FILED FOR RECORD THIS  
6th DAY OF June, 1990  
9:30 am IN LIBER 2  
PAGE 381  
W. J. St. Louis  
Register of Deeds

or corners in

Crawford Located In: Corner Code #  
(County)

Public Land Survey T 27N R 1W M-9  
T R  
T R  
T R

Property Controlling S T R  
In Section S T R  
Miscellaneous S T R  
Property in Sec. S T R

Register of Deeds Stamp & File Number

Lot No. \_\_\_\_\_, Recorded Plat \_\_\_\_\_  
Private Claims \_\_\_\_\_

	A	B	C	D	E	F	G	H	I	J	K	L	M
2	6	5	4	3	2	1							
3													
4	7	8	9	10	11	12							
5													
6	13	14	15	16	17	18							
7													
8	19	20	21	22	23	24							
9													
10	25	26	27	28	29	30							
11													
12	31	32	33	34	35	36							
13													

Norman C. Caldwell field survey on March, 19 90  
I hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as pressed below:

**NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.**

Description of original monument and accessories and/or subsequent restoration:

(M-9) Post set by Hodgson & Sibley, May 18, 1839.  
Birch 8" S29°W .32 (21.12')  
Bl. Oak 8" N18°W .18 (11.88')


Description of corner evidence found and/or method applied in restoring or reestablishing corner:

(M-9) C.O. Seeley, Feb. 1, 1913 (Oscoda Co. surveyor) fnd. the orig. U.S. cor.  
LaGuire, 1934, fnd. a post but no witness trees  
K.J. Ostling, LS 10068, could not locate mon. & placed DNR pipe & cap by reconstruction of LaGuire line Westerly 8-28-72.  
N09°W 39.8' 15" W. Pine  
N74°W 39.35' 16" R. Pine  
rec. in L 1, pg 15

Description of monument for corner and accessories established to perpetuate locating the position of the corner:

(M-9) Stand. cor. 24&25, T27N-R1W  
Fnd. DNR pipe & cap @ West edge of N-S fireline. Accepted as the best available evidence of the position of the orig. corner.  
North 0.5' Carsonite Witness Post  
N10°W 40.0' 18" W. Pine (R)  
N70°W 39.9' 16" N. Pine (R)  
S35°W 26.1' 6" W. Pine  
S55°E 30.8' 4" W. Pine

Witnessed by Norman C. Caldwell Date June 6, 1990  
Surveyor's Michigan License No. 12018

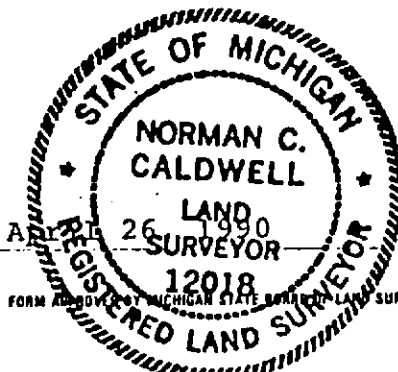

FORM APPROVED BY MICHIGAN STATE BOARD OF LAND SURVEYORS, JAN. 28, 1971  
REVISED MAY 14, 1975  
REVISED JAN., 1983