

MAR 29 2000

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

For corners in SECTION

Crawford
(County)

Located In:

Corner Code #

STATE OF MICHIGAN
CRAWFORD COUNTY
RECORDED

22 FEB 2000 12:45 PM

SANDRA MOORE
REGISTER OF DEEDS

Register of Deeds Stamp & File Number

1. Public Land Survey	T <u>28N</u> R <u>1W</u>	<u>E-1</u>
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

LIBER 4 PAGE 86

I, Ronald C. Brand, in a field survey on October 14, 1999 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2	6			5		4		3		2			
3													
4	7			8		9		10		11		12	
5													
6	18			17		16		15		14		13	
7													
8	19			20		21		22		23		24	
9													
10	30			29		28		27		26		25	
11													
12	31			32		33		34		35		36	
13													

A. Description of original monument and accessories and/or subsequent restoration:
E-1 Northeast corner Section 5

1839 James Mullett Set post corner of Sections 4 & 5 Pine 6" N9°W 29 links, Pine 8" N51°E 60 links

1856 Resurvey Harvey Mellon at 80.00 chains Set post corner of Sections 4 & 5 on old line & 5.22' West of old corner Spr. Pine 7" N36°E 43 links, Spr. Pine 10" N20°W 30 links

1968 DNR Retracement, Kenneth Ostling, Set Standard Monument from 1914 E.S. Houghton NBT R. Pine 24" S50°E 103.7' (Houghton), R. Pine 6" S50°W, 76.1', R. Pine 7" N60°W 32.5'

1968 S.O. Thorsen, Otsego County Surveyor notes, Liber 3, Page 488, Standard Conservation Dept. monument 1" pipe w/4" cap R. Pine 6" S58°W 76.1', R. Pine 7" N60°W 32.5', R. Pine 24" S50°E 103.7' (Houghton 1914)

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:
E-1 Northeast corner Section 5


Fd. Standard DNR monument 15' +/- North of centerline trail road
Fd. dead 24" R. Pine S50°E 103.6', Fd. 15" R. Pine S60°W 76.23'

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:
E-1 Northeast corner Section 5

Fd. Standard DNR monument is accepted as a careful and faithful reestablishment of the position of the original corner. Monument is 15' +/- North of centerline trail road and falls on West edge of clear cut area to South
Fd. dead 24" R. Pine S50°E 103.6'
Set Nail & Tag in blazed 8" J. Pine S23°W 41.80', Set Nail & Tag in 15" R. Pine S60°W 76.23',
Set Nail & Tag in 5" J. Pine N20°W 22.02', Set Nail & Tag in blazed 17" R. Pine N61°E 32.76'

CRAWFORD COUNTY
PEER GROUP APPROVAL
DATE Nov 30, 1999

Signed by Marvin E. Myers, P.S.
Surveyor's Michigan License No. 43046

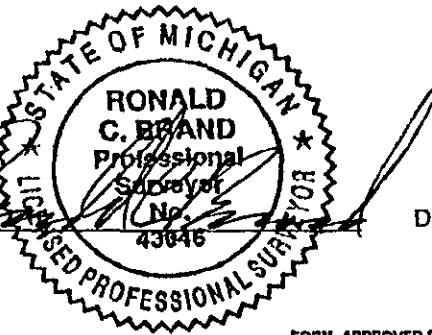

Date 12/22/99