

**SURVEY & REMONUMENTATION**

JAN 26 1998

STATE OF MICHIGAN  
COUNTY OF CHARLEVOIX  
RECEIVED FOR RECORD

97 DEC 15 PM 2:48

**SECTION**

**LAND CORNER RECORDATION CERTIFICATE**  
Filing Requirement of Act 74, Mich. P.A. 1970

*Charles M. Boss*  
REGISTER OF DEEDS

For corners in

Charlevoix

Located In:

Corner Code #

(County)

1. Public Land Survey

T 32NR 7W

A-13

T R

T 32NR 8W

M-13

T R

2. Property Controlling in Section

S T R

S T R

3. Miscellaneous Property in Sec.

S T R

S T R

4. Lot No. \_\_\_\_\_, Recorded Plat \_\_\_\_\_

5. Private Claims \_\_\_\_\_

Wayne E. Boss

May 1997

I, Wayne E. Boss, in a field survey on May, 1997 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

Register of Deeds Stamp & File Number

A	B	C	D	E	F	G	H	I	J	K	L	M
1												
2	6	5	4	3	2	1						
3												
4	7	8	9	10	11	12						
5												
6	18	17	16	15	14	13						
7												
8	19	20	21	22	23	24						
9												
10	30	29	28	27	26	25						
11												
12	31	32	33	34	35	36						
13												

A. Description of original monument and accessories and/or subsequent restoration:

A-13 OCT. 1856  
E.D. ATWATER, DEPUTY SURVEYOR  
FOUND POST  
OTHER WITNESSES NOT NOTED

ABOUT 1977  
LAWRENCE R. FEINDT  
FOUND 1/2" IRON  
1. 11" MAPLE S25W 18.25'  
2.5" MAPLE NORTH 7.10'  
3. 7. MAPLE N55W 8.20'

MAY 26, 1983  
NICHOLAS B. DEYOUNG  
FOUND 1/2" IRON  
1. 11" MAPLE S25W 18.25'  
2. 5" MAPLE NORTH 7.10'  
3. 7" MAPLE N85W 8.20'

ABOUT 1993 3/4" PIPE FOUND BY CHARLEVOIX ABSTRACT & ENGINEERING CO.  
NO WITNESSES NOTED.


B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

A-13 MAY 1997  
FOUND 1" PIPE  
AT NORTH SIDE OF TRAIL ROAD  
1. FOUND STUMP WITH PK NAIL S25W 18.3'  
2. FOUND 6" MAPLE NORTH 7.0'  
3. 10" MAPLE N85W 8.60'

Charlevoix Co. Surveyor  
APPROVED  
Signature *Wayne E. Boss*  
Date: 10-23-97

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

A-13 FOUND 1" PIPE REPLACED WITH CHARLEVOIX COUNTY CONCRETE MONUMENT  
1. STUMP WITH PK NAIL S25W 18.3'  
2. 6" MAPLE NORTH 7.0'  
3. 10" MAPLE N85W 8.60' SET NAIL & TAG  
4. TWIN 8" MAPLE NORTH 8.36' SET SPIKE & TAG  
5. 12" POPLAR S42E 32.47' SET NAIL & TAG  
6. 10" MAPLE S20W 25.65' SET NAIL & TAG  
AND IS ACCEPTED AS A CAREFUL & FAITHFUL REESTABLISHMENT OF THE POSITION OF THE ORIGINAL CORNER

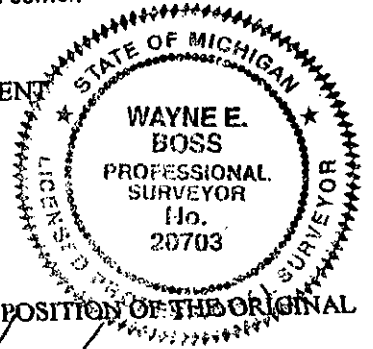

Signed by *Wayne E. Boss*  
Surveyor's Michigan License No. 20703

Date 12/12/97