


LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. PA 1970


For Corners In:
Charlevoix
 (County)

| | Located In | Corner Code # |
|--------------------------------------|--------------------------------------|---------------|
| 1. Public Land Survey | T _____ R _____ | _____ |
| | T _____ R _____ | _____ |
| 2. Property Controlling in Section | S <u>23</u> T <u>33N</u> R <u>4W</u> | <u>9</u> |
| | S <u>23</u> T <u>33N</u> R <u>4W</u> | <u>5</u> |
| 3. Miscellaneous Property in Section | S _____ T _____ R _____ | _____ |
| | S _____ T _____ R _____ | _____ |
| 4. Lot No: _____ | Recorded Plat: _____ | |
| 5. Private Claims: _____ | | |

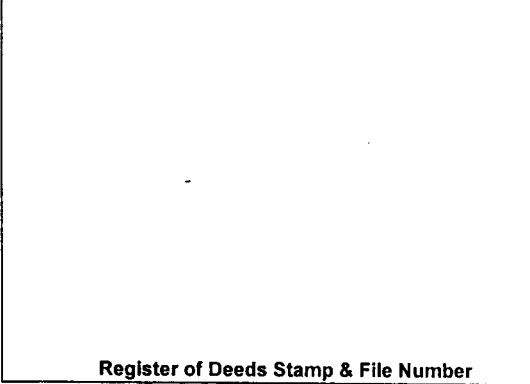

I, Carl T. Kiiskila, in a field survey on October, 1999 do hereby state that under requirements of PA 74, Michigan PA of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

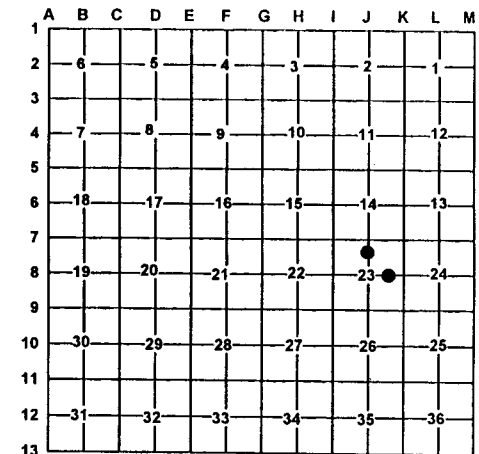

A. Description of original monument and accessories and/or subsequent restoration:

9- This corner position was not established during the original government survey.

5- This corner position was not established during the original government survey.

B. Description of corner evidence found and/or method applies in restoring or re-establishing corner:

9- Established the northeast corner of the northwest quarter of the southeast quarter of section 23 per standard BLM instruction for subdivision of a section.

5- Established the southwest corner of the northwest quarter of the northeast quarter of section 23 per standard BLM instructions for a subdivision of a section.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

9- Set 5/8"X32" rerod with cap
 Wit: 14" Maple with wire N22°W 23.56'
 8" Maple N40°E 14.70'
 16" Maple S31°E 19.17'
 16" Maple with wire S46°W 21.65'
 Carsonite post North 1'

5- Set 5/8"X32" rerod with cap
 Wit: 12" Hemlock S72°W 9.20'
 5" Basswood N30°E 26.19'
 16" Hemlock S80°E 11.73'
 3" Ironwood S07°W 22.51'
 Carsonite post North 1'

Signed by: Carl T. Kiiskila
 Surveyor's Michigan License No.: 33981

Date: 1-26-00

