

SURVEY & REMONUMENTATION

MAY 05 1997

COMMISSION

**RE MONUMENTATION
LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970**

For corners in

Cheboygan (County)	Located In:	Corner Code #
1. Public Land Survey	T <u>33N</u> R <u>3W</u>	M-12
	T <u> </u> R <u> </u>	_____
	T <u> </u> R <u> </u>	_____
	T <u> </u> R <u> </u>	_____
2. Property Controlling in Section	S <u> </u> T <u> </u> R <u> </u>	_____
	S <u> </u> T <u> </u> R <u> </u>	_____
3. Miscellaneous Property in Sec.	S <u> </u> T <u> </u> R <u> </u>	_____
	S <u> </u> T <u> </u> R <u> </u>	_____

RECEIVED
FILED
96 NOV 25 PM 12:56
Jenna Harty
CLERK/REGISTER
CHEBOYGAN COUNTY, MICHIGAN

Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

I, Brian K. Fullford, in a field survey on August, 1996 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law, established, re-established, monumented, recovered, found as expressed below:

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2	6		5		4		3		2		1		
3													
4	7		8		9		10		11		12		
5													
6	18		17		16		15		14		13		
7													
8	19		20		21		22		23		24		
9													
10	30		29		28		27		26		25		
11													
12	31		32		33		34		35		36		
13													

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:
G.L.O.
Set 1/4 Section Post
16" Pine N19°E 14 Links
8" Fir S25°W 19 Links

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:
Fnd 1/2" Bar Leaning, N44°E 0.68' of Single Proportion Position
Between NE & SE Section Corners
10" Cedar S36°W 20.05' w/60p nail
11" Cedar N46°E 16.65' w/60p nail
Squared off Cedar Stake Laying on Ground
Old Fence to North & to East




LIBER 010 PAGE 200

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

M-12 Replaced 1/2" Bar with 5/8" x 36" Iron Bar with Remonumentation Cap. Accepted as a careful & faithful re-establishment of the position of the original corner.

5" Cedar N03°E 26.78" Set Tag
11" Cedar N46°E 16.65' w/60p nail
10" Cedar S36°W 20.05' w/60p nail
10" Fir N19°W 25.07' Set Tag
280' +/- East of Old R.R. Grade

Marcus A. Puetz

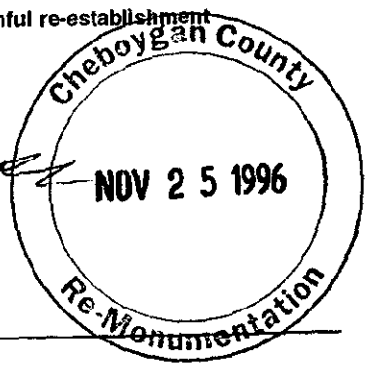

THIS CORNER IS ALSO DESIGNATED AS CORNER CODE #A-12, IN T33N-R2W.

Signed by *Brian K. Fullford*
Surveyor's Michigan License No. 41099

Date 10/22/96

Brian K Fullford PS