

SURVEY & REMONUMENTATION

MAY 05 1997

CHEBOYGAN COUNTY REMONUMENTATION CORNER

COMMISSION

LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. P.A. 1970

For corners in CHEBOYGAN
(County)

Located In:

Corner Code #

1. Public Land Survey	T	<u>35NR</u>	<u>1W</u>	<u>M-10</u>
	T	_____	R	_____
	T	_____	R	_____
	T	_____	R	_____
2. Property Controlling in Section	S	_____	T	R
	S	_____	T	R
3. Miscellaneous Property in Section	S	_____	T	R
	S	_____	T	R

RECEIVED FOR RECORD

96 OCT -1 PH 4: 20

Joanna Spray
CLERK/REGISTER
CHEBOYGAN COUNTY, MICHIGAN

Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

A	B	C	D	E	F	G	H	I	J	K	L	A
2	6	5	4	3	2	1						
3												
4	7	8	9	10	11	12						
5												
6	18	17	16	15	14	13						
7												
8	19	20	21	22	23	24						
9												
10	30	29	28	27	26	25						
11												
12	31	32	33	34	35	36						
13												

I, Ronald Bischer, in a field survey on August 27, 19 96, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Professional Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:


1840 GLO Survey- John Hodgson
Set Wood Post
Ironwood 8" S22° E 16 lks
Lynn 8" N57° W 19 lks

1965 Survey- Kenneth Ostling #10068
Set 1/2" Rod by single proportion
set 2 witnesses

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

Found 1/2" rod and one of Ostlings Witnesses

Replaced with Cheboygan County Remonumentation Monument




LIBER 010 PAGE 165

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

Cheboygan County Remonumentation Monument

N33° E 39.43' 10" Norway
S21° E 78.13' 16" Norway
S51° W 58.75' 10" Spruce
N80° W 47.15' 6" Norway

Morris A. Rose

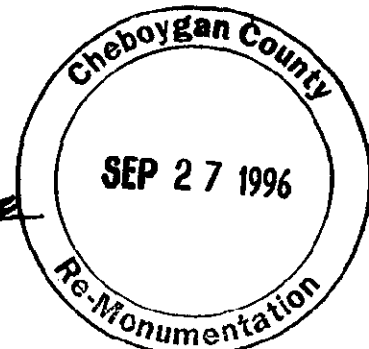

Signed by Ronald R. Bischer

Date Sept. 18, 1996

Surveyor's Michigan License No. 22428