

FEB 26 1998

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

SECTION

For corners in

CHEBOYGAN (County)

Located In:

Corner Code #

RECEIVED FOR RECORD

at 9:14 O'Clock A M

Signature of Joanne Spray

CLERK/REGISTER CHEBOYGAN COUNTY, MICHIGAN

Register of Deeds Stamp & File Number

Table with 3 columns: Description (Public Land Survey, Property Controlling, etc.), Located In (T35N R3W), and Corner Code # (K-12).

4. Lot No. , Recorded Plat
5. Private Claims


I, Ronald Bischer, in a field survey on Oct 9, 1997 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

Grid table with columns A-M and rows 1-13, containing numbers 1-36.

A. Description of original monument and accessories and/or subsequent restoration:

K-12
GLO notes
Harvey mellen
1855 Resurvey
Set Post
10" Spruce pine S26° E 26 lks
9" Spruce Pine N16° E 13 lks
1946 Joseph Doyle #3177
Set 1" pipe and 3 witnesses
1992 Mark Ennes #25842
set 1/2" rod in Mon. Box




B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

K-12
Found 1/2" rod in Mon. Box
Found 3 Ennes witnesses
Replaced 1/2" rod with 5/8" rod and Remon cap

LIBER 011 PAGE 62

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

K-12
5/8" Rod and remon cap in mon. box
N82° W 57.74' 7" Jack Pine Ennes Witness
S80° E 47.75' 6" Jack Pine Ennes witness
S38° E 80.64' 5" Jack Pine Ennes witness
N29° W 74.53' Power Pole
N40° E 83.61' Power Pole

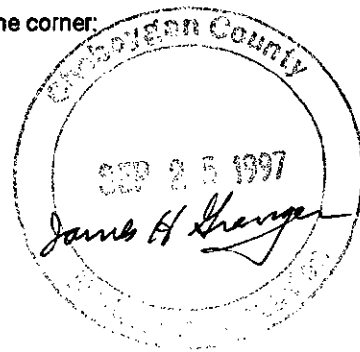

Signed by Ronald R. Bischer
Surveyor's Michigan License No. 22428

Date Oct. 10, 1997