

JAN 23 1996

COMMISSION

CHEBOYGAN COUNTY REMONUMENTATION CORNER
LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. P.A. 1970

For corners in
CHEBOYGAN
(County)

Located In:

Corner Code #

1. Public Land Survey	T	<u>35N</u>	R	<u>3W</u>	<u>M-10</u>	
	T	_____	R	_____	_____	
	T	_____	R	_____	_____	
	T	_____	R	_____	_____	
2. Property Controlling in Section	S	_____	T	_____	R	_____
	S	_____	T	_____	R	_____
3. Miscellaneous Property in Section	S	_____	T	_____	R	_____
	S	_____	T	_____	R	_____

RECEIVED
FOR RECORD

95 DEC 26 PM 2:40

Joanna Spary
CLERK/REGISTER
CHEBOYGAN COUNTY, MICHIGAN

Register of Deeds Stamp & File Number

- 4. Lot No. _____, Recorded Plat _____
- 5. Private Claims _____

A	B	C	D	E	F	G	H	I	J	K	L	M
2	6	5	4	3	2							
3												
4	7	8	9	10	11	12						
5												
6	18	17	16	15	14	13						
7												
8	19	20	21	22	23	24						
9												
10	30	29	28	27	26	25						
11												
12	31	32	33	34	35	36						
13												

I, RICHARD C. DUNN, in a field survey on AUGUST, 1995, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Professional Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:


G.L.O. John Mullett 1840
Set 1/4 Section Post
6" Pine N79°W 17 Links
7" Tamarack N77°E 32 Links

Orlando Doyle #7319
March 1948
Set 1/2" Pipe
8" Cor. Fence Post SW 38.38'
6" Cedar East 19.76'

Delmer Porter #15410
Oct. 1983
Fnd. "T" iron
Fence Cor. North 35.10'
Fence Cor. East 41.85'
Tele. Cable Box S58°W 46.65'

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

Found "T" Iron.

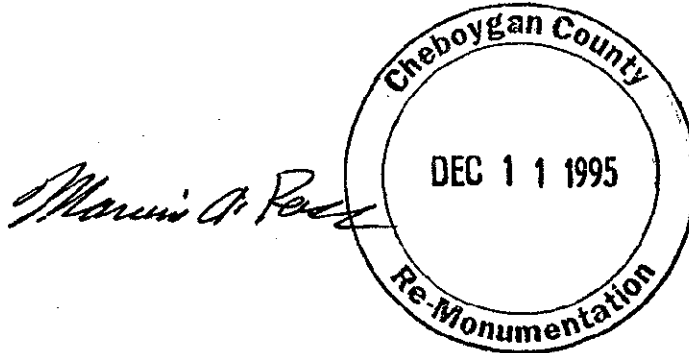

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

M-10 Found "T" Iron and is accepted as a careful and faithful reestablishment of the position of the original corner.
Replaced w/5/8" re-rod and remonumentation cap.

Fence Cor. w/tag 15410	North	35.21'
Fence Cor. w/tag 15410	N83°E	42.00'
7" Cedar w/60P	S72°W	65.88'
10" Tw. Maple, Set PK	S48°E	43.92'

LIBER 010 PAGE 142

Signed by Richard C. Dunn Date DECEMBER 4, 1995

Surveyor's Michigan License No. 12020