

SURVEY & MONUMENTATION
CHEBOYGAN COUNTY REMONUMENTATION CORNER
JAN 23 1996 **LAND CORNER RECORDATION CERTIFICATE**
Filing Requirement of Act 74, Mich. P.A. 1970

For corners in **COMMISSION**

<u>CHEBOYGAN</u> (County)	Located In:	Corner Code #
<u>Burt Township</u>		
1. Public Land Survey	T <u>36N</u> R <u>3W</u>	<u>M-11</u>
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____

RECEIVED FOR RECORD
95 SEP 18 AM 10:07
Joanna Spray
CLERK/REGISTER
CHEBOYGAN COUNTY, MICHIGAN
Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
 5. Private Claims _____

A	B	C	D	E	F	G	H	I	J	K	L	M
2	6	5	4	3	2	1						
3												
4	7	8	9	10	11	12						
5												
6	18	17	16	15	14	13						
7												
8	19	20	21	22	23	24						
9												
10	30	29	28	27	26	25						
11												
12	31	32	33	34	35	36						
13												


I, Ronald Bischer, in a field survey on July 5, 19 95, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

- A. Description of original monument and accessories and/or subsequent restoration:
- | | |
|-------------------------|-----------------------------|
| 1840 Original Survey | 1973 Survey |
| John Mullett | Orlando Doyle |
| Set wood post | Found Concrete Mon |
| 9" W. Oak N47°W 6 lks | S35°W 5.82' 10" Tw. Red Oak |
| 8" Pine S76°E 63 lks | S30°E 35.45' 9" Red Oak |
| 1971 Survey | N25°W 36.41' 6" W. Oak |
| C. Eugene Ostling | |
| Found Concrete Monument | |
| no witnesses recorded | |

3. Description of corner evidence found and/or method applied in restoring or reestablishing corner:


Found Concrete monument, set Cheboygan County Remonumentation cap.
 N24°W 36.41' 8" W. Oak
 S29°W 5.82' 18" Red Oak
 West 33.00' 1/2" Rod set by Ostling



LIBER **010** PAGE **109**

Description of monument for corner and accessories established to perpetuate locating the position of the corner:

Concrete monument with Cheboygan County Remonumentation cap
 N24°W 36.41' 8" W. Oak
 S29°W 5.82' 18" Red Oak
 West 33.00' 1/2" Rod
 S29°E 37.29' 20" Red Oak

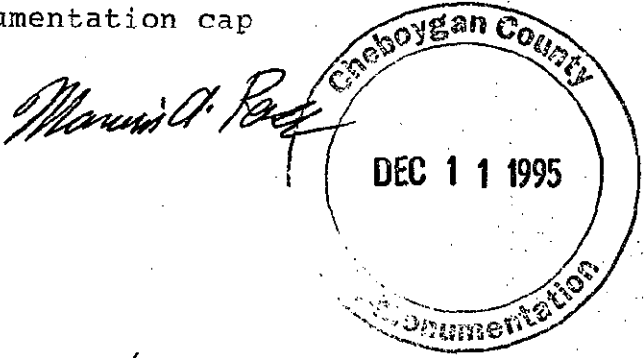

Nails and witness tags #22428 used.

Witnesed by Ronald R. Bischer Date July 28, 1995
 Surveyor's Michigan License No. 22428