

MICHIGAN
DEPARTMENT OF CONSERVATION
FORESTRY DIVISION

LAND CORNER RECORD

T. 37. NR. 1. E.

Ch. 38n COUNTY

DESCRIPTION OF CORNER 1/4 corner between sections 16 and 21

DESCRIPTION OF CORNER MONUMENT 1" Iron pipe with 4" Brass cap

WITNESSES TO CORNER 5" Tamarack - N 79 E - 2.15 chains

3" Tamarack - S 62 E - 1.61 chains


10" Red Pine - S 23 E - 3.74 chains

DESCRIPTION IN DETAIL AS TO HOW CORNER WAS LOCATED AND IDENTIFIED OR RESTORED.

Corner was established by proportionate measurement. Two probable B.T.'s still in place, but not positively identified.

Corner was placed November 2, 1950.

SURVEYORS SEAL

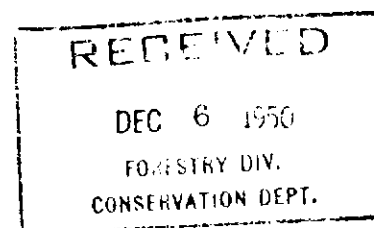

SIGNED Gene C. DeF. Matus
REGISTERED LAND SURVEYOR

DATE 12/4/50