

**SURVEY &
REMONUMENTATION**

CHEBOYGAN COUNTY REMONUMENTATION CORNER

RECEIVED
FOR RECORD

MAY 03 1995 **LAND CORNER RECORDATION CERTIFICATE**
Filing Requirement of Act 74, Mich. P.A. 1970

94 NOV 22 AM 10:27

James H. Granger

CLERK/REGISTER
CHEBOYGAN COUNTY, MICHIGAN

COMMISSION

For corners in

CHEBOYGAN
(County)

Located In:

Corner Code #

- | | | |
|---------------------------------------|--------------------------|------------|
| 1. Public Land Survey | T <u>37N</u> R <u>1W</u> | <u>B-3</u> |
| | T _____ R _____ | _____ |
| | T _____ R _____ | _____ |
| | T _____ R _____ | _____ |
| 2. Property Controlling
in Section | S _____ T _____ R _____ | _____ |
| | S _____ T _____ R _____ | _____ |
| 3. Miscellaneous
Property in Sec. | S _____ T _____ R _____ | _____ |
| | S _____ T _____ R _____ | _____ |

Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

	A	B	C	D	E	F	G	H	I	J	K	L	M
2	6		5		4		3		2		1		
3	●												
4	7		8		9		10		11		12		
5													
6	18		17		16		15		14		13		
7													
8	19		20		21		22		23		24		
9													
10	30		29		28		27		26		25		
11													
12	31		32		33		34		35		36		
13													

I, Ronald Bischer, in a field survey on July 7, 19 94, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:


NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

May 1856 GLO Resurvey Notes
Set Wood Post
Sugar 16" S15°W 31 links
W. Pine 30" S68°E 18 links

02-01-93 - James H. Granger
Found 1/2" Rod w/cap #15410
no witnesses given

02-10-76 - Delmar E. Porter
Set 1/2" Rod and Cap #15410 at fence corner
N50°E 45.84' 5" White pine
S60°E 50.24' 6" White pine



B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

1/2" Rod and Cap #15410 at fence corner
N50°E 45.84' 11" White pine
S60°E 50.24' 12" White pine


Replaced 1/2" Rod and cap with Cheboygan County Remonumentation Monument.

C. Description of monument for corner and accessories established to perpetuate the position of the corner:

Cheboygan County Remonumentation Monument
N50°E 45.84' 11" White pine
S60°E 50.24' 12" White pine
S62°W 29.37' 7" White pine
N75°W 1.31' Fence corner

LIBER 010 PAGE 76

Monica A. P...

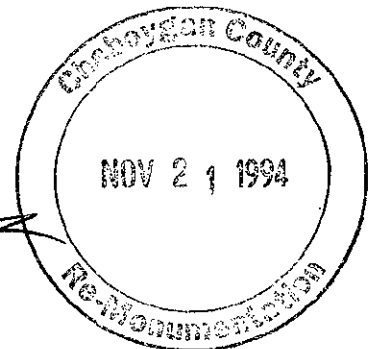

Signed by Ronald R. Bischer

Date Oct. 25, 1994

Surveyor's Michigan License No. 22428