

SURVEY & REMONUMENTATION

CHEBOYGAN COUNTY REMONUMENTATION CORNER

MAY 03 1995

LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. P.A. 1970

RECEIVED FOR RECORD

94 NOV 22 AM 10:28

Jeanne Spray
CLERK/REGISTER
CHEBOYGAN COUNTY, MICHIGAN

For corners in

CHEBOYGAN COMMISSION
(County) Located In:

Corner Code #

1. Public Land Survey	T <u>37N</u> R <u>1W</u>	<u>B-5</u>
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____

Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

A	B	C	D	E	F	G	H	I	J	K	L	M
2	6	5	4	3	2	1						
3												
4	7	8	9	10	11	12						
5												
6	18	17	16	15	14	13						
7												
8	19	20	21	22	23	24						
9												
10	30	29	28	27	26	25						
11												
12	31	32	33	34	35	36						
13												

I, Ronald Bischer, in a field survey on July 7, 1994, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

May 1856 GLO Resurvey Notes	02-10-76 - Delmar E. Porter
Set Wood Post	1" Pinched pipe
Hemlock 16" N55°E 21 links	N80°W 2.33' 5" Apple
Maple 8" S45°W 20 links	S80°E 3.21' Fence post
01-18-76 - Delmar E. Porter	
Found 1" Pinched pipe	
N80°W 2.33' 5" Apple	
S80°E 3.21' Fence post	



B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:


Found both Porter witnesses.
Set Cheboygan County Remonumentation Monument from old witnesses.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

Cheboygan County Remonumentation Monument
N80°W 2.33' 5" Apple tree
S80°E 3.21' Fence post
S85°W 9.48' Fence post
East 16.14' Fence post

LIBER 010 PAGE 77

Marcus A. Ross

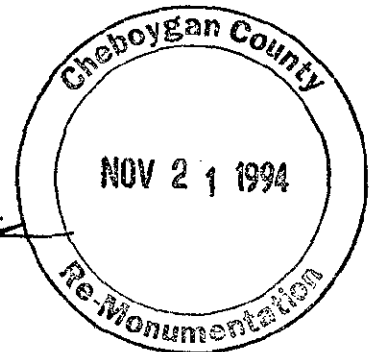

igned by Ronald R. Bischer
urveyor's Michigan License No. 22428

Date Oct. 25, 1994