

MAY 05 1997

COMMISSION

CHEBOYGAN COUNTY REMONUMENTATION CORNER

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

For corners in CHEBOYGAN
(County)

Located In:

Corner Code #

1. Public Land Survey	T	<u>37NR 2W</u>	<u>A-11</u>
	T	___ R ___	_____
	T	___ R ___	_____
	T	___ R ___	_____
2. Property Controlling in Section	S	___ T ___	_____
	S	___ T ___	_____
3. Miscellaneous Property in Section	S	___ T ___	_____
	S	___ T ___	_____

RECEIVED FOR RECORD

96 OCT -1 PM 3: 56

Joanna Garay
CLERK/REGISTER
CHEBOYGAN COUNTY, MICHIGAN

Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

A	B	C	D	E	F	G	H	I	J	K	L
2	6	5	4	3	2	1					
3											
4	7	8	9	10	11	12					
5											
6	18	17	16	15	14	13					
7											
8	19	20	21	22	23	24					
9											
10	30	29	28	27	26	25					
11											
12	31	32	33	34	35	36					
13											

I, Ronald Bischer, in a field survey on September 3, 19 96, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Professional Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:


1840 GLO Survey - John Mullett
Set Wood Post
Sugar 12" S78° E 18 lks
Sugar 8" N68° W 4lks

1973 Orlando Doyle #7319
Found 1" pipe
Set three witnesses


B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

Found 1" pipe and 1 Doyle witness

Replace with Cheboygan County Remonumentation Monument



Marcus A. Ross

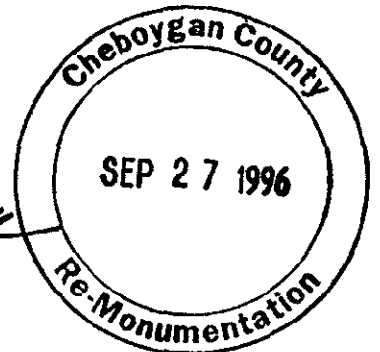

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

Cheboygan County Remonumentation Monument

S52° W 41.68' 40" Maple
S40° E 48.67' Cor. Fence Post
N25° E 77.30' 24" Lynn
N50° W 45.82' Telephone Cable Box

LIBER 010 PAGE 147

Signed by Ronald R. Bischer

Date Sept 18, 1996

Surveyor's Michigan License No. 22428