CHEBOYGAN COUNTY REMONUMENTATION CORNER

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

For corners in

CHEBOYGAN (County) Located In: Corner Code #

RECEIVED FOR RECORD 12-18-97
at 11:22 O'Clock A M

Joanne Spray
CLERK/REGISTER
CHEBOYGAN COUNTY, MICHIGAN

Register of Deeds Stamp & File Number

1. Public Land Survey		T 37N	R 2W	C-3
		T___	R___	
		T___	R___	
		T___	R___	
2. Property Controlling	S___	T___	R___	
in Section	S___	T___	R___	
3. Miscellaneous	S___	T___	R___	
Property in Sec.	S___	T___	R___	

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

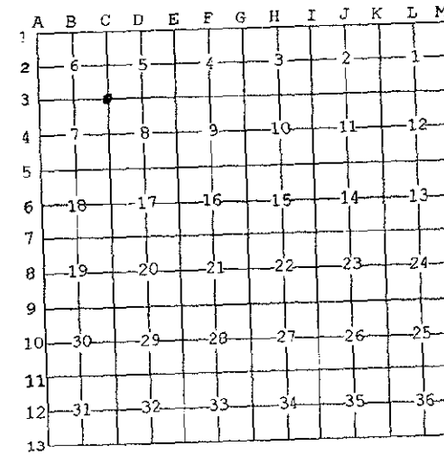

I, JAMES H. GRANGER, in a field survey on JULY 15, 19 97 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

C-3 1840 Original Survey — Set wood post — 12" Beech S73°E 22 lks; 18" Sugar N42°W 32 lks
Harvey Mellen

1979 Survey — 3/4" rod
Orlando Doyle #7319

SURVEY & REMONUMENTATION

FEB 26 1998

SECTION

Cheboygan County
SEP 25 1997
James H Granger

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

C-3 Found 3/4" rod and 4 witnesses, grown over, from 1979 survey. Replaced with 5/8" rebar and remonumentation cap.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

C-3 5/8" rebar and Remonumentation Cap

Triple 24" Maple	S40°E	16.85'	Set tag #16041
Twin 12" Maple	S17°W	13.85'	Set tag #16041
5" Maple	S80°W	20.16'	Set tag #16041
Triple 12" Maple	N30°E	61.71'	Set tag #16041

LIBER 011 PAGE 26

Signed by James H Granger Date Nov. 17, 1997 Surveyor's Michigan
License No. 16041

STATE OF MICHIGAN
JAMES H. GRANGER
PROFESSIONAL SURVEYOR
No. 16041
LICENSED PROFESSIONAL SURVEYOR

FORM APPROVED BY MICHIGAN STATE BOARD OF PROFESSIONAL SURVEYORS, JAN. 28, 1971
REVISED 14,1975
REVISED JAN., 1983
REVISED OCT., 1996