

CHEBOYGAN COUNTY REMONUMENTATION CORNER

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

For corners in

<u>CHEBOYGAN</u> (County)	Located In:	Corner Code #
1. Public Land Survey	38W 2W T 37NR 2W	E-13 E-1
2. Property Controlling in Section	T ___ R ___	___
3. Miscellaneous Property in Sec.	T ___ R ___	___
	S ___ T ___ R ___	___
	S ___ T ___ R ___	___
	S ___ T ___ R ___	___

RECEIVED FOR RECORD 12-18-97
at 12:00 O'Clock A M
James H. Granger
CLERK/REGISTER
CHEBOYGAN COUNTY, MICHIGAN
Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

A	B	C	D	E	F	G	H	I	J	K	L	M
1												
2	6		5		4		3		2		1	
3												
4	7		8		9		10		11		12	
5												
6	18		17		16		15		14		13	
7												
8	19		20		21		22		23		24	
9												
10	30		29		28		27		26		25	
11												
12	31		32		33		34		35		36	
13												

I, JAMES H. GRANGER, in a field survey on JULY 15, 19 97 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and for that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.


A. Description of original monument and accessories and/or subsequent restoration:

- E-1 1840 Original Survey Set wood post 8" Spruce N67°W 21 lks
John Mullett 6" Spruce N64°E 8 lks
- 1955 LCRC Iron marked wood stake
Orlando Doyle #7319

SURVEY & REMONUMENTATION

FEB 26 1998

SECTION

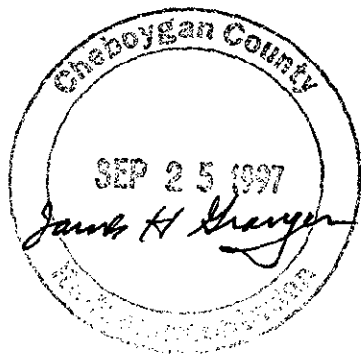

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:


- E-1 Found 1/2" iron with cap #12020 and remains of old squared wood post in marsh at corner position. Replaced with 5/8" rebar and remonumentation cap.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

- E-1 5/8" rebar and Remonumentation Cap
- 20" W. Pine N83°E 14.85' Set tag #16041
- 3" Spruce S51°E 2.39' Set tag #16041
- 8" Spruce S13°W 28.51' Set tag #16041
- 3" Spruce N19°W 21.46' Set tag #16041

Signed by James H. Granger
License No. 16041

Date Nov. 17, 1997 Surveyor's Michigan



FORM APPROVED BY MICHIGAN STATE BOARD OF PROFESSIONAL SURVEYORS, JAN. 28, 1971
REVISED 14, 1975

REVISED JAN., 1983
REVISED OCT., 1996