

CHEBOYGAN COUNTY REMONUMENTATION CORNER

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

For corners in

CHEBOYGAN Located In: Corner Code #
(County)

1. Public Land Survey 38N 2W H-13
T 37NR 2W H-1
T ___ R ___
T ___ R ___
T ___ R ___

2. Property Controlling in Section S ___ T ___ R ___
S ___ T ___ R ___

3. Miscellaneous Property in Sec. S ___ T ___ R ___
S ___ T ___ R ___

RECEIVED FOR RECORD 12-18-97
at 11:34 O'Clock A M
James H. Granger
CLERK/REGISTER
CHEBOYGAN COUNTY, MICHIGAN
Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

I, JAMES H. GRANGER, in a field survey on JULY 15, 19 97 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.


A. Description of original monument and accessories and/or subsequent restoration:

H-1 1840 Original Survey Set wood post 12" Tamarack N42°E 24 lks
John Mullett 10" Spruce N22°W 11 lks

1995 Survey 5/8" iron
James H. Granger #16041

SURVEY &
REMONUMENTATION
FEB 26 1998
SECTION

1	A	B	C	D	E	F	G	H	I	J	K	L	M
2	6			5			4		3		2		1
3													
4	7			8			9		10		11		12
5													
6	18			17			16		15		14		13
7													
8	19			20			21		22		23		24
9													
10	30			29			28		27		26		25
11													
12	31			32			33		34		35		36
13													

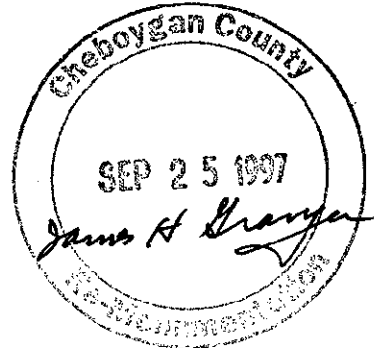

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:


H-1 Found 5/8" rod and 3 witnesses from 1995 survey. Set remonumentation cap on 5/8" rod.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

H-1 5/8" rod and Remonumentation Cap
Fence post S50°E 85.74' Fd tag #16041
4" Poplar S82°W 70.61' Fd tag #16041
Fence post N 6°E 39.33' Fd tag #16041
8" Poplar S22°W 127.82' Set tag #16041

Signed by James H. Granger
License No. 16041

Date Nov. 17, 1997 Surveyor's Michigan



FORM APPROVED BY MICHIGAN STATE BOARD OF PROFESSIONAL SURVEYORS, JAN. 28, 1971
REVISED 14, 1976

REVISED JAN., 1983
REVISED OCT., 1996