

SURVEY & MONUMENTATION

CHEBOYGAN COUNTY REMONUMENTATION

RECEIVED FOR RECORD

MAY 03 1995

LAND CORNER RECORDATION CERTIFICATE

94 NOV 22 AM 9:49

Filing Requirement of Act 74, Mich. P.A. 1970

COMMISSION

James H. Granger
CLERK/REGISTER
CHEBOYGAN COUNTY, MICHIGAN

For corners in
Cheboygan
(County)

Located In:

Corner Code #

1. Public Land Survey	T	<u>38N</u>	R	<u>2W</u>	<u>K-8</u>
	T	_____	R	_____	_____
	T	_____	R	_____	_____
	T	_____	R	_____	_____
2. Property Controlling in Section	S	_____	T	_____	R
	S	_____	T	_____	R
3. Miscellaneous Property in Sec.	S	_____	T	_____	R
	S	_____	T	_____	R

Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

	A	B	C	D	E	F	G	H	I	J	K	L	M
2	6	5	4	3	2								
3													
4	7	8	9	10	11	12							
5													
6	18	17	16	15	14	13							
7													
8	19	20	21	22	23	24							
9													
10	30	29	28	27	26	25							
11													
12	31	32	33	34	35	36							
13													

I, James H. Granger, in a field survey on August 15, 19 94, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.


A. Description of original monument and accessories and/or subsequent restoration:

- 1856 Original Survey Set Wood Post 9" Cedar S79°E 24 lks, 9" W. Birch N38°W 29 lks John Mullett
- 1947 Orlando Doyle #7319 Fd 1 1/4" pipe
- 1953 Orlando Doyle #7319 Fd 1" pipe
- 1990 Norman Quaine #33984 Fd 1" pipe

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

Fd 1" pipe. Fd 3 witness. Reset 5/8" rebar w/ aluminum cap in Monument Box. Set 1 new witness.


Marvin O. Russ

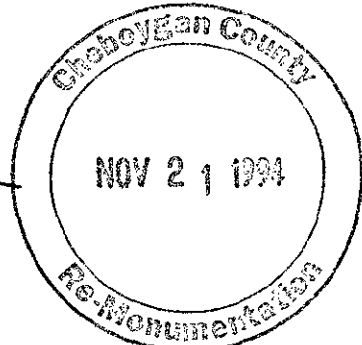

Description of monument for corner and accessories established to perpetuate locating the position of the corner:

- 5/8" rebar with aluminum cap in Monument Box
- 12" Cedar S78°W 12.72'
- 18" Maple N05°W 8.60'
- 14" Balsam N50°E 20.48'
- 10" Birch S55°E 18.19'

LIBER **010** PAGE **53**



Signed by James H. Granger

Date 11-18-94

Surveyor's Michigan License No. 16041