

SURVEY & REMONUMENTATION
CHEBOYGAN COUNTY REMONUMENTATION CORNER

LAND CORNER RECORDATION CERTIFICATE
 Filing Requirement of Act 74, Mich. P.A. 1970

MAY 05 1997

Cor corners in
 CHEBOYGAN

COMMISSION

Located In:

Corner Code #

(County)

<input type="checkbox"/> Public Land Survey	T <u>38N</u> R <u>3W</u>	<u>M-8</u>
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
<input type="checkbox"/> Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
<input type="checkbox"/> Miscellaneous	S _____ T _____ R _____	_____
<input type="checkbox"/> Property in Sec.	S _____ T _____ R _____	_____

RECEIVED
 FOR RECORD
 96 OCT 30 PM 12:17
James H. Granger
 CLERK/REGISTER
 CHEBOYGAN COUNTY, MICHIGAN
 Register of Deeds Stamp & File Number

Lot No. _____, Recorded Plat _____

Private Claims _____

JAMES H. GRANGER, in a field survey on SEPTEMBER 24, 19 96
 hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Licensed Surveyors or by a Decree of a Court of Law; established, re-established, monumented, covered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2		6		5		4		3		2		1	
3													
4		7		8		9		10		11		12	
5													
6		18		17		16		15		14		13	
7													
8		19		20		21		22		23		24	
9													
10		30		29		28		27		26		25	
11													
12		31		32		33		34		35		36	
13													


Description of original monument and accessories and/or subsequent restoration:

1840 Original Survey John Mullett	Set wood post 12" Cedar N19°W 19 lks 10" Cedar S19°E 21 lks
1964 DNR - LCRC Ken Larsen # 10695	Set 1" pipe w/4" brass cap

Description of corner evidence found and/or method applied in restoring or reestablishing corner:

Found DNR monument brass cap and two witnesses.

Maurice O. Ross

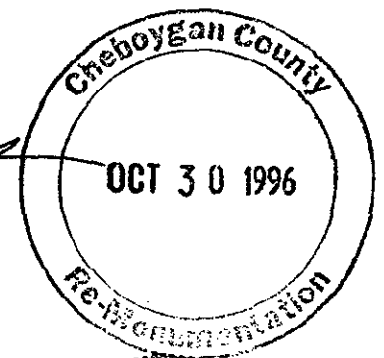

LIBER 010 PAGE 175

Description of monument for corner and accessories established to perpetuate locating the position of the corner
also corner A-8, T38N, R2W

DNR monument with brass Cap

0" Cedar	N27°W	25.49'	Set nail w/tag in scribed tree
6" Poplar	S68°W	4.41'	Set nail w/tag
4" Cedar	S78°E	22.14'	Set nail w/tag in scribed tree
6" Cedar	S24°E	12.80'	Set nail w/tag



By James H. Granger
 Surveyor's Michigan License No. 16041

Date 10-10-96