

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

For corners in

Dickinson
(County)

Located In:

Corner Code #/

1. Public Land Survey	T <u>39N</u> R <u>29W</u>	<u>I-1</u>
	T " R "	<u>J-1</u>
	T " R "	<u>K-1</u>
	T " R "	
2. Property Controlling In Section	S _____ T _____ R _____	
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	

REGISTER OF DEEDS
 DISKINSON COUNTY
 RON KERRICK, COUNTY CLERK

1993 OCT - 1 PM 2:28

RECORDED

Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
 5. Private Claims _____

A	B	C	D	E	F	G	H	I	J	K	L	M
2	6	5	4	3					2			
3												
4	7	8	9	10	11	12						
5												
6	18	17	16	15	14	13						
7												
8	19	20	21	22	23	24						
9												
10	30	29	28	27	26	25						
11												
12	31	32	33	34	35	36						

I. Edward Kazianka, in a field survey on July 30, 19 93, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

- I-1 Wood Post Maple 6 N27E 15 W. Pine 30 N43W 11
1 1/2 inch iron pipe set by persons unknown.
- J-1 Wood Post W. Pine 16 N13E 27 W. Pine 14 N37W 16
- K-1 Wood Post Sugar 12 N45E 16 Hemlock 12 N38W 27 Sugar 12 S35E 15
Sugar 12 S16W 29
1 1/4 inch iron pipe set by persons unknown.

ACCEPTED BY THE DICKINSON COUNTY SURVEY PEER GROUP AS THE OFFICIAL CORNER UNDER MICHIGAN PUBLIC ACT 345 OF 1990 AT A MEETING HELD ON 6-7-94

RJP
 COUNTY REPRESENTATIVE

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

- I-1 Found 1 1/2 inch iron pipe ten inches below surface of county road. Accepted pipe as marking the site of the original section corner.
- J-1 No evidence of original corner or accessories found. Set Quarter Corner by proportionate measurement at mid-point and on line between section corners 1/2 mile to the east and west.
- K-1 Found 1 1/4 inch iron pipe at fence corner. Old fences to the north and east, stone fence to the south. Accepted pipe as making the site of the original corner.


C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

- I-1 1 1/2 inch Iron Pipe. Power Pole N80W 36.65 feet Lone fence post N54E 52.0 feet Angle post in cattle fence N07W 60.0 feet Centerline Co. Road East 2.5 feet
- J-1 2 1/2 inch Alum. cap on a four foot re-rod. Cherry 5 N59W 31.25 feet
Cherry 5 N37E 25.07 feet Aspen 10 S19W 80.40 feet W. Birch 5 N69E 26.66 feet
- K-1 2 1/2 inch Alum. cap on a three foot Alum. rod. Set corner against 1 1/4 inch iron pipe.
Basswood 11 N47E 6.40 feet Hemlock 11 N64W 22.55 feet
Maple 7 S 05E 47.27 feet Oak 6 S46W 21.00 feet

Signed by Edward Kazianka

Date Oct. 1, 1993

Surveyor's Michigan License No. 14765

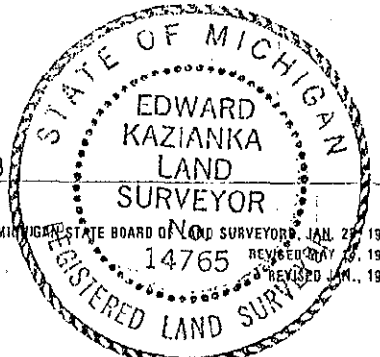

Sub 2 Page 64