

MICHIGAN
DEPARTMENT OF CONSERVATION
FORESTRY DIVISION

LAND CORNER RECORD

T. 40. NR28. W. . . .

----- Dickinson ----- COUNTY

DESCRIPTION OF CORNER Section Corner common to Sections 17, 18, 19, 20

DESCRIPTION OF CORNER MONUMENT 1" pipe with 4" brass cap

WITNESSES TO CORNER 10" Sugar Maple N. 69° W. 9 links

14" Hemlock N. 8° E. 55 links

DESCRIPTION IN DETAIL AS TO HOW CORNER WAS LOCATED AND IDENTIFIED OR RESTORED.


Replace Section Corner 17, 18, 19, 20.

Two Hemlock stp. bottoms in proper position.

Distance South to top of ridge checks. Distance West to Section Corner checks.

Corner placed and witnessed August 9, 1955.

SURVEYORS SEAL

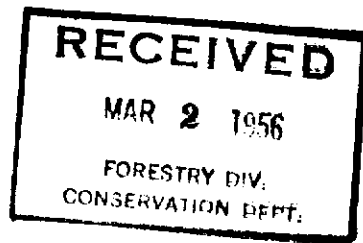

SIGNED

Billy D. Buckles
REGISTERED LAND SURVEYOR

DATE 2/27/56