

APR 02 1998

RECORDED

1998 FEB 20 AM 9:40

SECTION

LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. P.A. 1970

For corners in

Dickinson (County)
 Felch Township
 1. Public Land Survey Located In: T 43N R 28W Corner Code #: E-11 & E-13
 T R
 T R
 T R
 T R
 2. Property Controlling in Section S T R
 S T R
 3. Miscellaneous Property in Sec. S T R
 S T R
 4. Lot No. Recorded Plat
 5. Private Claims

REGISTER OF DEEDS
DICKINSON COUNTY
RON NOBLE 1991 48900

Register of Deeds Stamp & File Number

I, Edward Kazianka, in a field survey on January 8, 1998, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

| A | B | C | D | E | F | G | H | I | J | K | L | M |
|----|----|----|----|----|----|----|---|---|---|---|---|---|
| 2 | 6 | 5 | 4 | 3 | 2 | 1 | | | | | | |
| 3 | | | | | | | | | | | | |
| 4 | 7 | 8 | 9 | 10 | 11 | 12 | | | | | | |
| 5 | | | | | | | | | | | | |
| 6 | 16 | 17 | 16 | 15 | 14 | 13 | | | | | | |
| 7 | | | | | | | | | | | | |
| 8 | 19 | 20 | 21 | 22 | 23 | 24 | | | | | | |
| 9 | | | | | | | | | | | | |
| 10 | 30 | 29 | 28 | 27 | 26 | 25 | | | | | | |
| 11 | | | | | | | | | | | | |
| 12 | 31 | 32 | 33 | 34 | 35 | 36 | | | | | | |
| 13 | | | | | | | | | | | | |

A. Description of original monument and accessories and/or subsequent restoration:

- E-11 Corner common to Sections 28, 29, 32 and 33. Post by J. Burt, D.S. in September 1850. W.Pine 16 S51W 16 lks. W.Pine 18 N 05E 16 lks. Mich Dept. of Con. Pipe & Cap by B. Buckler on 8-22-63. (Report # 767) W.Pine 12 N24E 34 lks. W.Pine 9 S50W 76 1/2 lks.
- E-13 Corner common to Sections 32, 33, 4 & 5. Post by J. Burt, D.S. in June 1846. Cedar 14 N41W 55 lks. Cedar 12 S41W 15 lks. Tam. 12 S66E 25 lks. Mich. Dept. of Con. Pipe & Cap by B. Buckler on 7-18-55. (Report # 141) Cedar 6 N66E 58 lks. Cedar 5 S88W 17 lks.


B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

- E-11 Dept. of Conservation monument. Northeast N.B.T. living. Southwest N.B.T. cut down.
- E-13 Dept. of Conservation Monument. Both N.B.T.'s still living.

ACCEPTED BY THE DICKINSON COUNTY SURVEY PEER GROUP AS THE OFFICIAL CORNER UNDER MICHIGAN PUBLIC ACT 345 OF 1990 AT A MEETING HELD ON 2-19-98
R.O.P.
COUNTY REPRESENTATIVE

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

- E-11 Dept. of Conservation monument. W.Pine 13 N24E 22.82 feet. R.Pine 14 S62E 31.32 feet. W.Pine 4 S81W 10.00 feet. W.Pine 6 N71W 17.92 feet. Carsonite Marker North 3.0 feet.
- E-13 Dept. of Conservation monument. Cedar 10 S88W 11.45 feet. Cedar 11 N66E 38.75 feet. Cedar 5 S30E 16.72 feet. Cedar 9 N 09W 24.02 feet. Carsonite Marker N45E 3.0 feet.

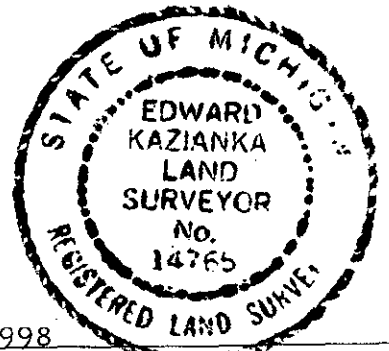

Signed by Edward Kazianka Date Feb. 20, 1998

Surveyor's Michigan License No. 14765