

MAR 05 1998

1997 REMONUMENTATION PROGRAM LAND CORNER RECORDATION CERTIFICATE Filing Requirement of Act 74, Mich. P.A. 1970

RECORDED

REGISTERED


DEC 29 11 32 AM '97

GENESEE COUNTY MASTER OF DEEDS

Register of Deeds Stamp & File Number

SECTION For corners in

Table with columns: Genesee (County), Located In, Corner Code #. Rows include Public Land Survey, Property Controlling in Section, Miscellaneous Property in Sec., Lot No., and Private Claims.

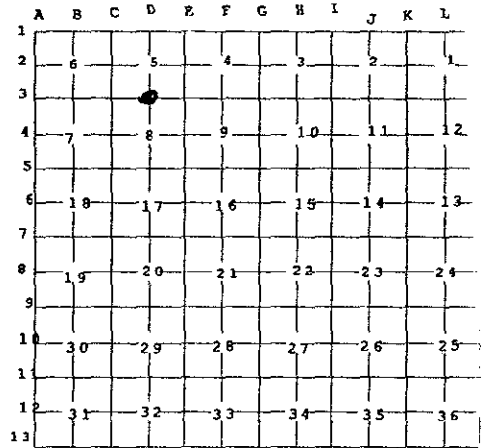

I, Kevin B. Cleaver, in a field survey on September 30, 1997, do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

- List of survey dates and descriptions of monuments and accessories, including 'Set post and two (2) accessories', 'Iron, three (3) accessories', 'Recorded Plat of "Grovelawn" L 15, P 30', etc.

Ratified by Peer Group in accordance with P.A. 345, 1990

Co. Rep. Carl Carlson Date 10-2-97

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

Found Boat Spike in Monument Box Found angle E-3, D-3, D-4 from September 28, 1997 survey of "Grovelawn" Plat L 15, 30; Found plat monumentation in the recorded plat of "Hillcrest Country Estates" L 36, P 20 December 16, 1960; Found plat monumentation in the recorded plat of "Hillcrest Country Estates No. 1" L 37, Ps 3 and 4 September 18, 1961; Found two (2) accessories from July 14, 1972 survey L 1842 P 396; Found two (2) accessories from Sept. 11, 1974 survey L 1923 P 939; Found two (2) accessories from March 2, 1977 survey L 1980 P 591; Found two (2) accessories from October 14, 1987 survey L 2305 P 937; Found two (2) accessories from September, 1987 GEI records; Found three (3) accessories from November 27, 1990 LCRC L 2415 P 178; Found two (2) accessories from September 6, 1992 survey L 2471 P 384; Found three (3) accessories from June 29, 1995 GEI records. The monument found was ratified by the Genesee County Peer Review Committee on October 2, 1997, as the accepted corner.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

Set the standard Bernsten monument SS-A-5-BR-30 with 3 1/4" brass cap stamped Genesee County Re-monumentation Corner 1997, #29242 in concrete over a boat spike in a monument box.

- List of bearings and distances for monument location: N 34° W, 50.39' - Set nail/Genesee County witness tag in the Southwest face of a power pole; N 48° E, 96.66' - Set nail/Genesee County witness tag in the Northwest face of a 10" elm; S 45° W, 76.13' - Found bent nail and tag in the Southeast face of a power pole; S 24° E, 89.98' - Found MSHD nail and tag in the East face of a power pole; S 50° E, 81.95' - Found bent nail and tag in the Southwest face of a power pole

Signed by Kevin Banfield Cleaver, P.S., Field Manager

Date 12/24/97

Surveyor's Michigan License No. 29242



BOARD APPROVED BY MICHIGAN STATE BOARD OF PROFESSIONAL SURVEYORS, JAN. 28, 1971

REVISED MAY 14, 1976

REVISED JAN., 1983 REVISED OCT., 1995