

NOV 12 1997

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

For corners in

Gogebic
(County)

Located In:

Corner Code ##

1. Public Land Survey	T <u>47N</u> R <u>44W</u>	<u>F-3</u>
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____

Register's Office }
Gogebic County } ss.

Received for record the
18TH day of AUGUST
A. D. 1997 at 11:00 o'clock
A m., and recorded in
Liber 6 of CORNERS
on page 190
Ramona Collins, Deputy
Register of Deeds


Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

$\frac{1}{4}$ Corner 4 & 9; T.47 N., R.44 W.

I, Richard L. Drahn in a field survey on August 11, 1997, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules theretore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

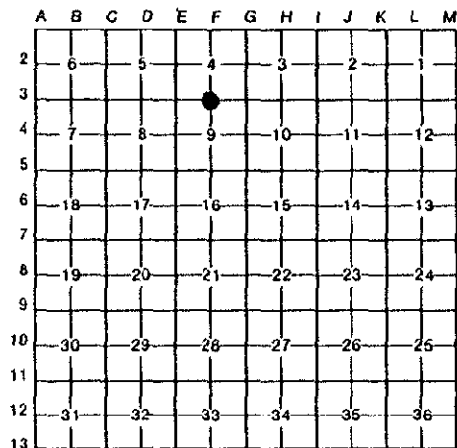

A. Description of original monument and accessories and/or subsequent restoration:

Corner established by William Burt in 1848. Original B.T.s --- 14" Sugar N.25 E. 3 links (1.98') --- Cedar 12" S.10 W. 17 links (11.22') ---

Corner restored by R.L. Drahn on 7/25/83 from the decayed remains of the Sugar Maple B.T. and natural feature calls and line trees east and west. He set a 2" X 30" aluminum pipe with a 3 1/4" stamped alum. cap and the following new B.T.s: --- 5" (6") Sugar Maple N.73 W. (N.74 W.) 11.95' (11.94') --- 9" (10") Sugar Maple N.48 E. (N.47 E.) 11.59' (11.59') --- 5" Black Ash (dead stub) S.61 E. (S.62 E.) 13.67' (13.64') --- 6' Steel sign rail N.03 W. (N.03 W.) 3.20' (3.19') ---

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

Corner recorded in Gogebic County Liber 2, Page 577 on 2/15/84.

Corner research on file with Gogebic County records.

Recovered the monument as described and the bearing trees as noted in parentheses above. Only a series of root holes remains of the original Sugar B.T. at N.25 E., 2.0'.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

From the above described monument I established the following new B.T.:

8" Sugar Maple S.04 E. 16.27'

PEER GROUP APPROVED

Richard L. Drahn 8/13/97
COUNTY REPRESENTATIVE



Signed by Richard L. Drahn

Date August 11, 1997

Surveyor's Michigan License No. 21564

USFS E-11