SURVEY & REMONUMENTATION

FEB 15 2001

SECTION

IOSCO COUNTY REMONUMENTATION CORNER

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

014 2001

STATE OF MICHIGAN
IOSCO COUNTY
FILED

13 FEB 2001 9:21:24 AM

BONITA M. COYLE
REGISTER OF DEEDS

Register of Deeds Stamp & File Number

For corners in

IOSCO
(County)

	Located In:	Corner Code #
1. Public Land Survey	T22N R 5E	M - 10
	T22N R 6E	A - 10
	T___ R___	
	T___ R___	
2. Property Controlling in Section	S___ T___ R___	
	S___ T___ R___	
3. Miscellaneous Property in Sec.	S___ T___ R___	
	S___ T___ R___	

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

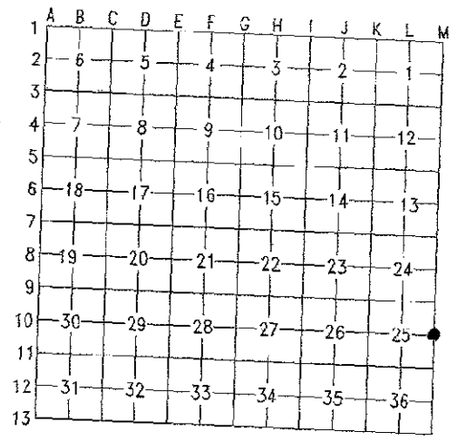

I, William J. Rigg, P.S., in a field survey on October 12 2000 do hereby state that under requirements of P A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 coners, all in the same town and range, may be recorded on this certificate

A. Description of original monument and accessories and/or subsequent restoration:

1844 +/-, GLO Survey, set post, 8" W. Pine, S56W 12 lks, 12" W. Pine, N39W 12 lks

1986 Timothy L. Lapham, Found 1" pipe at fence to West, See LCRC 86 - 04

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

Found and accepted 1" pipe as evidenced, witnesses check.

ACCEPTED BY THE IOSCO COUNTY SURVEY PEER GROUP AS THE OFFICIAL CORNER UNDER P.A. 345 OF 1990 AT A MEETING HELD ON 10-11-2000

James H. Granger

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

Replaced 1"pipe with 5/8" rerod and Remon Cap
S45W - 8" Maple - 22.54'
N45W - 18" Maple - 39.75'
N50E - 16" Twin Maple - 33.40'
West 0.5 ft. - Fence Post

STATE OF MICHIGAN
WILLIAM J. RIGG
PROFESSIONAL SURVEYOR
No 41108
LICENSED PROFESSIONAL ENGINEER

Signed by William J. Rigg P.S.

Surveyor's Michigan License No. #41108

Date December 22, 2000

FORM APPROVED BY MICHIGAN STATE BOARD OF PROFESSIONAL SURVEYORS, JAN 28, 1971
REVISED MAY 14, 1975
REVISED JAN., 1983
REVISED OCT., 1995