

SURVEY & REMONUMENTATION

APR 27 1995

COMMISSION

IOSCO COUNTY REMONUMENTATION CORNER LAND CORNER RECORDATION CERTIFICATE Filing Requirement of Act 74, Mich. P.A. 1970

STATE OF MICHIGAN
IOSCO COUNTY
FILED

5 DEC 94 1:56 P.M.

BONITA H. COYLE
REGISTER OF DEEDS

For corners in

<u>Iosco</u> (County)	Located In:	Corner Code ##
1. Public Land Survey	T <u>22N</u> R <u>8E</u>	<u>D - 9</u>
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
4. Lot No. _____, Recorded Plat _____		
5. Private Claims _____		

94-28

Register of Deeds Stamp & File Number

James H. Granger, in a field survey on September, 19 94, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

- A. Description of original monument and accessories and/or subsequent restoration:
- 1843 Original Survey
John Mullett
Set Wood Post
12" Oak N. 42 lks
12" Maple N73°W 66 lks
 - 1886 Sub'd
Joseph Dimmick's Add'n to East Tawas
 - 1888 Sub'd
Alice Dimmick's Add'n to East Tawas

- B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:
- No sub'd evidence found. Located corner C-9 and N. Sec. line from adjacent sub'ds. Measured distance between NW & NE Sec. corners. Established corner position on Sec. line extended from C-9 cor. by single proportionate measurement.


ACCEPTED BY THE IOSCO COUNTY SURVEY PEER GROUP AS THE OFFICIAL CORNER UNDER P.A. 345 OF 1990 AT A MEETING HELD ON 11-10-94

James H. Granger

- C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

Set 5/8" x 30" rebar with alum. cap

N15°E	88.00'	N.W. cor Klinger Plumbing & Heating (gray block building)
N60°E	76.00'	N.W. cor. Perry Drug Store (tan block building)
N40°E	63.58'	Set tag in Power Pole
West	69.24'	Set tag in Power Pole

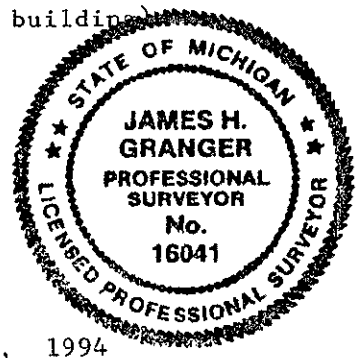

Signed by James H. Granger
Surveyor's Michigan License No. 16041

Date November 10, 1994