LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

1999 IOSCO COUNTY REMONUMENTATION CORNER

For corners IOSCO Located In: _____ Corner Code #

1. Public Land Survey T 24N R 9E G-2

2. Property Controlling in Section S ___ T ___ R ___

3. Miscellaneous Property in Sec. S ___ T ___ R ___

4. Lot No. _____ , Recorded Plat _____

5. Private Claims _____

99 - 64

STATE OF MICHIGAN
IOSCO COUNTY
FILED

22 DEC 99 2:40 P.M.

PONITA M. CUOLE
REGISTER OF DEEDS

Register of Deeds Stamp & File Number

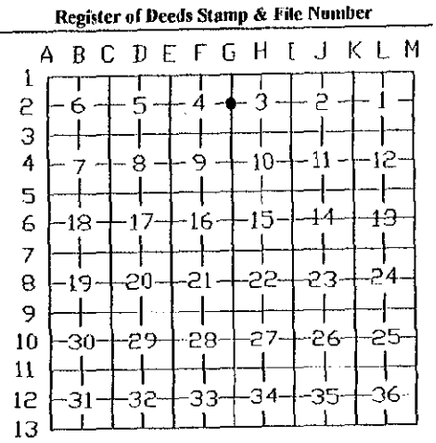

I, WILLIAM E. WOODS P.S. , in a field survey on DEC. 10 , 1999 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

1843: ORIGINAL GOVERNMENT NOTES

SET POST
BLACK ASH 6" S22°E 13 LKS
CEDAR 12" N66°E 16 LKS

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner

SET CORNER BY SINGLE PROPORTIONATE BETWEEN G-1 & G-5

ACCEPTED BY THE IOSCO COUNTY SURVEY FEER GROUP AS THE OFFICIAL CORNER UNDER P.A. 345 OF 1990 AT A MEETING HELD ON 10-13-99
James H Granger

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner

SET 5/8" REBAR & REMON CAP

SET NAIL & TAG N32°W 2.48' 10" W. PINE
SET NAIL & TAG S22°W 12.99' 10" W. PINE
SET NAIL & TAG S83°E 28.06' 12" TWIN & 18" ASH
SET NAIL & TAG S37°E 24.97' 3" W. PINE

STATE OF MICHIGAN
WILLIAM E. WOODS
PROFESSIONAL SURVEYOR
No. 25882
LICENSED PROFESSIONAL SURVEYOR

Signed by William E Woods Date 12-15-99
WILLIAM E. WOODS P.S.

Surveyor's Michigan License No. 25882

FORM APPROVED BY MICHIGAN STATE BOARD OF PROFESSIONAL SURVEYORS, JAN. 28, 1971
REVISED MAY 14,1975
REVISED JAN., 1983

REF

APR 2 Y 2000

SECTION