


# LAND CORNER RECORDATION CERTIFICATE

## FILING REQUIREMENT OF ACT 74, MICH. P.A.1970

FOR CORNERS OF--:	LOCATED IN--:	CORNER CODE NUMBER
1. PUBLIC LAND SURVEY _____	T. <u>44</u> <sup>N.</sup> / <sub><del>S.</del></sub> R. <u>34</u> <sup><del>W.</del></sup> / <sub>W.</sub>	L7
2. PROPERTY CONTROLLING IN SECTION <u>13</u>	, T. <u>44</u> <sup>N.</sup> / <sub><del>S.</del></sub> R. <u>34</u> <sup><del>W.</del></sup> / <sub>W.</sub>	16
3. MISCELLANEOUS PROPERTY IN SECTION _____	, T. _____ <sup>N.</sup> / <sub>S.</sub> R. _____ <sup>E.</sup> / <sub>W.</sub>	
4. LOT NO. _____, RECORDED PLAT _____		
5. PRIVATE CLAIMS _____		

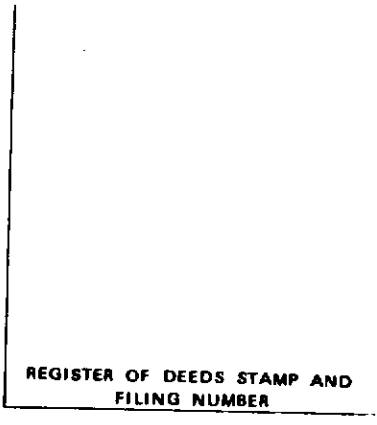

I, Arthur O. Enger, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were, in a field survey on see below, 19\_\_\_\_, established, re-established, monumented, re-monumented, recovered or restored as expressed below and in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a court of law. Furthermore, that the corner points mentioned in lines 3, 4 and 5 above were, in a field survey on \_\_\_\_\_, 19\_\_\_\_, found, recovered, restored, established or re-established as expressed below and in conformance with the rules of the Michigan State Board of Registration for Land Surveyors or, by a Decree of a Court of law:

A. Description of original monument and accessories and/or subsequent restoration:

**Corner L7** (¼ corner between Sections 13 & 24, T44N, R34W):

- Wood post (Not found. See B for subsequent monument.)
- Y. Birch 12 N65W 35 ( " " . No subsequent accessories found.)
- Sugar 10 S47E 10 ( " " " " " " " " )

**Corner 16** (East 1/16 corner between Sections 13 & 24, T44N, R34W):  
Not established in original survey nor subsequently, apparently.

B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:

**Corner L7:** Re-established 8/24/76 between Sec. Cor. S89°33.3'W 40.028 ch. and Sec. Cor. N89°33.4'E 40.031 ch. (This was supposed to have been set midway on line between sec. corners, but a later remeasurement revealed the above slight deviation from the intended point). Found a 2"x3"x30" squared cedar post S37°W 37.4 ft. for an approx. corner.

**Corner 16:** Established 7/15/77 on line between ¼ cor. 20.015 ch. W and Sec. Cor. 20.016 ch. E.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

**Corner L7:** 1" I.D. x 36" iron pipe with 3 3/4" aluminum cap  
W. Spruce 11 N24°W (mag.) 24.7 ft. "¼S, NBT"  
Red Maple 5 S52°W (mag.) 21.8 ft. "¼S, NBT"

**Corner 16:** 1" I.D. x 36" iron pipe with 3 3/4" aluminum cap  
Red Maple 10 N35°W (mag.) 24.2 ft. "1/16S, BT"  
Red Maple 7 N9°E (mag.) 24.9 ft. "1/16S, BT"  
Declination 0°50' West

SIGNED BY \_\_\_\_\_ DATE August 1, 1977

SURVEYOR'S MICHIGAN REGISTRATION NO. \_\_\_\_\_ (SEAL)

FOR STATE AND UNITED STATES AGENCIES:

SIGNED BY \_\_\_\_\_ DATE \_\_\_\_\_

APPROVED AND SIGNED BY Arthur O. Enger DATE August  
MICHIGAN REGISTERED LAND SURVEYOR

Michigan Department of Natural Resources

SURVEYOR'S MICHIGAN REGISTRATION NO. 13581

