


LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

For corners in
Iron

_____	Located In:	Corner Code #
(County)		
1. Public Land Survey	T 45N R 31W	K9
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property In Sec.	S _____ T _____ R _____	_____

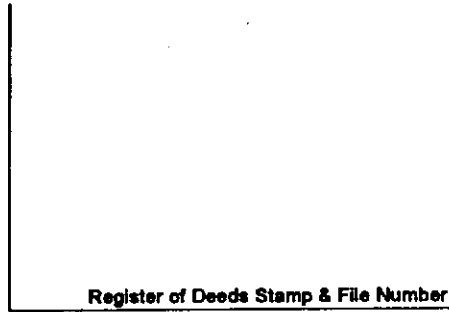

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

Nov 01 1995

I, Stephan J. Szyszkoski, in a field survey on _____, 19____ do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law, established, re-established, monumented, recovered, found as expressed below.

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

A	B	C	D	E	F	G	H	I	J	K	L	M
1												
2	6	5	4	3	2	1						
3												
4	7	8	9	10	11	12						
5												
6	18	17	16	15	14	13						
7												
8	19	20	21	22	23	24						
9												
10	30	29	28	27	26	25						
11												
12	31	32	33	34	35	36						
13												

A. Description of original monument and accessories and/or subsequent restoration:
(K9) Corner common to Sections 23-24-25-26. Corner previously recorded by Keith L. Sackett, RLS in 1980: "Found 1"x1" square and 20" long iron pin 7° Aspen S35E 38.13', 8° Tamarack S52W 45.10', Power Pole N79W 85.56'". Found no subsequent record.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

(K9) Found and accepted the iron pin noted above, as described, at record bearing and distance from the Aspen and Tamarack NBTs, both in good condition. The Power Pole witness is now gone. Left the pin in place and made two new witnesses as described below.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

(K9) Found 1" square iron pin.
Placed nail with NDNR reference tag in the following:
Power pole N81W 87.07'
Guy Pole S69W 89.95'
Bearings are magnetic.



Signed by Stephan J. Szyszkoski
Surveyor's Michigan License No. 33986

Date 11-27-95

For the Michigan Department of Natural Resources - Forest Management Division