

13336

MAY 08 1999

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970
Isabella County Remonumentation

SECTION

For corners in

Isabella (County) Located In: Corner Code #
1. Public Land Survey T 13N R 6W K-5
2. Property Controlling in Section S T R
3. Miscellaneous Property in Sec. S T R
4. Lot No. , Recorded Plat
5. Private Claims

9800013336
Filed for Record in
ISABELLA COUNTY, MI
SHARON A BROWN
On 12-30-1998 At 10:27:53 am.
RE LAND COR 9.00
OR Liber 1 Page 253 - 253


Register of Deeds Stamp & File Number

Grid table with columns A-M and rows 2-13. A dot is marked at the intersection of column J and row 5.

I, Timothy E Bebee, in a field survey on November 28, 1998, do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

- A. Description of original monument and accessories and/or subsequent restoration:
1837 J. Milroy GLO.....set post
1887 E. R. Coburn CS.....stake 3x3
1888 E. R. Coburn CS.....stake 3x3
1985 T. Mueller LCRC 772.....found 2 1/2" pipe
1985 T. Mueller unrecorded survey.....found 2 1/2" pipe
1985 H. Fluharty PA 132.....found 2 1/2" pipe(L004,P197)
1985 H. Fluharty PA 132.....found 2 1/2" pipe(L004,P200)
1991 G. Gray G. Gray unrecorded surveys....found 2 1/2" pipe

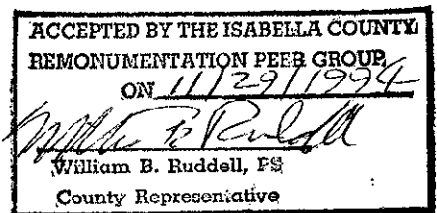


- B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:
Fond 4" disk on 3/4" iron. 1'±, North to centerline road and 6'± East to centerline road

- C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:
A Remonumentation monument stamped #17741, placed inside a monument box, was set at the position of the Corner and is accepted as the best available evidence of the perpetuated corner.

Witnesses:

- N 31° E 65.10' West edge of concrete r/w marker
S 72° E 83.64' nail & cap in NE side of utility pole
S 13° W 75.17' nail & cap in utility pole
N 49° W 150.88' Southeast corner of brick school house No.1



Signed by [Signature] Date 12/28/98
Surveyor's Michigan License No. 39074