

00518

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970
Isabella County Remonumentation

SURVEY &
REMONUMENTATION

MAR 09 1999

For Corners in

Isabella
(County)

Located In: Corner Code#:

- 1. Public Land Survey T. 15N R. 4W F-13
2. Public Controlling in Section S. T. R.
3. Miscellaneous Property in Section S. T. R.
4. Lot No. Recorded Plat
5. Private Claims

9900000548
Filed for Record in
ISABELLA COUNTY, MI
SHARON A BROWN
On 01-19-1999 At 09:40:55 am.
RE LAND COR 9.00
Liber 1 Page 309 - 309

SECTION

Register of Deeds Stamp & File Number


I, Jan S. Fokens, in a field survey on November 19, 1998, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law, established, re-established, monumented, re-monumented, recovered, found as expressed below.

Grid table with columns A-M and rows 1-13. Values include 6, 5, 4, 3, 2, 1, 7, 8, 9, 10, 11, 12, 18, 17, 16, 15, 14, 13, 19, 20, 21, 22, 23, 24, 30, 29, 28, 27, 26, 25, 31, 32, 33, 34, 35, 36.

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

- 1. G.L.O Original Survey Township Lines: 1st quarter 1837 John Hodgson Page 212, 216 Original Field Notes
2. County Survey Records: Liber 2, Page 111-112 December 1879 A.K. Herrington
3. L.C.R.C. Liber 1, Page 433 Herbert Fluharty Recorded date July 1977 Found 1/2" pipe
4. Surveys of Record: Liber 2, Page 66 Recorded Date July 1975 Set Railroad spike
5. Unrecorded Survey None available No Isabella County Road Commission Notes Available

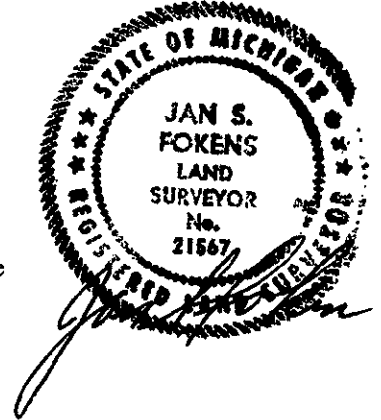

B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:

Found Remonumented corner F-1
Recorded in error in 1995 as F-1 (Liber 1, Page 40).
This corner established in Isabella County Remonumentation Program. See dossier for detailed report.

Accepted as the best available evidence of the position of the original corner and replaced with Standard Monument Corner.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:
Set Standard Isabella County Monument in Monument Box stamped F-13 and P.S. 21567.

F-13 S. 1/4 Corner, Section 33, T.15N.-R.4W., Isabella Township, Isabella County
N.46°E. 89.77' Found LSC nail and tag in W. face of transformer pole
N.15°W. 76.80' Found LSC nail and tag in E. face of drop telephone pole
S.34°E. 54.12' Top center of N. Gas valve enclosure pipe
S.42°W. 64.43' Telephone cable marker post
West 38.60' F-1, N. 1/4 Corner, Section 4, T.14N.-R.4W., Union Township, Isabella County

Signed by Jan S. Fokens
Surveyor's Michigan License No. 21567

Date Dec. 30, 1998

FORM APPROVED BY MICHIGAN STATE BOARD OF LAND SURVEYORS, JAN.28, 1971

REVISED MAY 14, 1975
REVISED JAN., 1983

