

LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. PA 1970

For Corners In:
Kalkaska Located In _____ Corner Code # _____
 (County)


- | | | | | | |
|--------------------------------------|---|-----|---|----|----|
| 1. Public Land Survey | T | 26N | R | 5W | C9 |
| | T | | R | | |
| 2. Property Controlling in Section | S | | R | | |
| | S | | R | | |
| 3. Miscellaneous Property in Section | S | | R | | |
| | S | | R | | |

4. Lot No: _____ Recorded Plat: _____

5. Private Claims: _____

I, Craig W. McVean, in a field survey on Feb. 10, 2009 do hereby state that under requirements of PA 74, Michigan PA of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

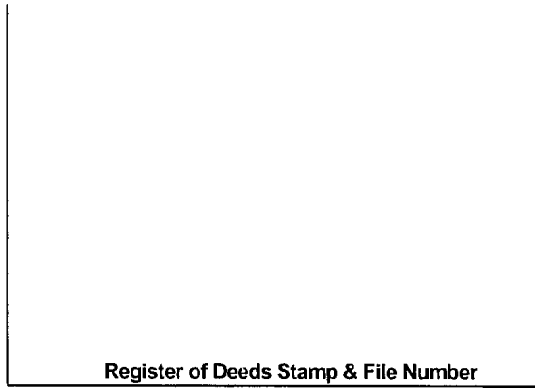

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2	6		5		4		3		2		1		
3													
4	7		8		9		10		11		12		
5													
6	18		17		16		15		14		13		
7													
8	19		20		21		22		23		24		
9			●										
10	30		29		28		27		26		25		
11													
12	31		32		33		34		35		36		
13													

A. Description of original monument and accessories and/or subsequent restoration:

C9 – 1852 – GLO – G. Cannon – Set Post

- 1) Tamarack 10" N43°W 34 L.
- 2) Cedar 8" S45°E 15 L.

- 1962 – G. D. Henning – Sec. 29 Survey (N. from SW Cor.) At 5300.00' the line intersected 14.5' West of the original US Corner. The NW bearing is a 12' Tamarack stub showing breast mark and all scribing very plain. The other is a cedar stump showing foot notch. A new corner post was set and witnesses taken. 3" Sq. cedar post in corner. 3) Wit. Tag on 8" Cedar N14°E 21.0';

4) Wit. Tag on 5" Cedar N87°W 17.0';

5) Wit. Tag on 8" Cedar South 19.7'

6) Wit. Tag on 5" Cedar S64½°E 11.7'

- 1974 – LCRC L. 1, p. 320 and Rec. Sur. L. 1, p. 531 – C. E. Ostling – Fd. ½" Bar. Same witnesses as Henning
- 1978 – Consumers Power Co. – Drawing No. S-F 17406, Sheet 9
- 3" Sq. Cedar post by G. Henning, RLS. Same witnesses as Henning.

B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:

C9 – Section Corner common to Sections 19, 20, 29 & 30 – Found 3" x 1.6' long Cedar post bottom with axed point just below surface of cedar swamp per Henning. No evidence of ½" bar as noted by Ostling. No evidence of Witness #1 or 2 now. Witness #3 has fallen. Witness 4, 5 & 6 are good. 3" Cedar post bottom accepted as a careful and faithful perpetuation of the position of the original corner.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

C9 – Drove stamped 4" DNR Alum. Cap on 1" x 6' long galv. iron pipe in place of cedar post bottom – Up 1'.

- Reset Post bottom on S. side monument as memorial.
- Set Blue Carsonite Post 1' N.
- N87°W 17.21' to set N & T in N. side 10" Cedar (#4)
- South 19.58' to set N & T in W. side 14" Cedar (#5)
- S64°E 11.97' to set N & T in S. side 12" Cedar (#6)
- N36°W 22.52' to set N & T in SW side 8" Cedar scribed 'XBT'
- N83°E 47.62' to set N & T in N. side 8" Tamarack scribed 'XBT'



Signed by: Craig W. McVean
 Surveyor's Michigan License No.: 39088

Date: 11/23/2009