


LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. PA 1970

For Corners In: <u>Kalkaska</u> (County)	Located In	Corner Code #	
1. Public Land Survey	T <u>27N</u> R <u>8W</u>	<u>A-4</u>	
	T _____ R _____	_____	
2. Property Controlling in Section	S _____ T _____ R _____	_____	
	S _____ T _____ R _____	_____	
3. Miscellaneous Property in Section	S _____ T _____ R _____	_____	
	S _____ T _____ R _____	_____	

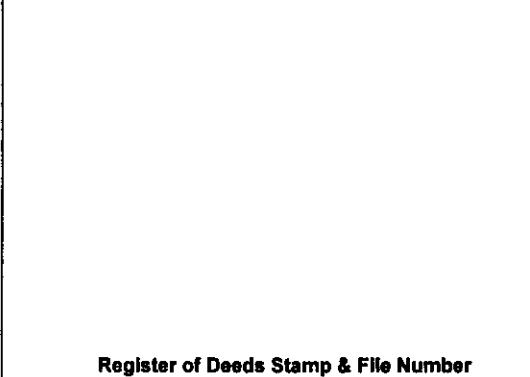

4. Lot No: _____ Recorded Plat: _____

5. Private Claims: _____

I, Craig W. McVean, in a field survey on May 11, 1999 do hereby state that under requirements of PA 74, Michigan PA of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2	6	5	4	3	2	1							
3													
4	7	8	9	10	11	12							
5													
6	18	17	16	15	14	13							
7													
8	19	20	21	22	23	24							
9													
10	30	29	28	27	26	25							
11													
12	31	32	33	34	35	36							
13													

A. Description of original monument and accessories and/or subsequent restoration:

- | | |
|---|---|
| <p><u>A-4</u> - 1850- GLO- L.Lyon
 set Ironwood post for 1/4 corner
 18" Beech N42°W 30 links
 18" Lynn S32°E 25 links</p> <p>- 1876 - W. Slawson - L.1, P.27 - G.T.Co. Rec. -
 perpetuated w/ stone w/ official marks</p> <p>- 1910 - W.S. Merrill - BK. 21, P.75 - Kalkaska Co. Rec.
 Stone w/ cross marked on top</p> <p>- 1967- K.J. Ostling- Found stone with cross per Merrill-1909
 Fall in line with E-W road and fence line South
 Set 1" pipe with 4" aluminum cap
 24" H. Maple S25°E 24.7'
 5" Red Pine N40°W 56.7'</p> | <p>- 1973. Rec. Sur. L.2, P.121 - W.B. Batzer -G.T.Co. Rec.
 FND 1" pipe & alum. cap
 S25°R 25.64' 30" Maple
 S51°W 74.85' J. Pine
 N48°W 61.55' 6" R. Pine</p> <p>- 1995- LCRC - L.3, P.615 - C.F. Roser-G.T.Co. Rec.
 Fnd. Dept. Mon. as set by K. Ostling at position
 of Fnd. stone in 1967
 12" Red Pine N50°W 59.40'
 5" Twin White Pine N55°E 57.05'
 38" Sugar Maple S25°E 25.64'
 5" Red Oak S55°W 90.08'
 Cedar Post with tag North 33'</p> |
|---|---|

B. Description of corner evidence found and/or method applies in restoring or re-establishing corner:

- A-4 - Standard 1/4 corner common to Sec. 12, T27N R9W and Sec. 7, T27N R8W - Found 4" DNR aluminum cap in E-W Gravel Rd. Also found inverted 0.7' x 0.7' x 0.6' granite stone w/ 'X' on top and chiseled 'S 1/4' on side buried on S. side of DNR Mon. DNR Monument at Slawson position per Merrill & Ostling accepted as a careful & faithful perpetuation of the position of the original corner.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

- A-4 - Replaced 4" DNR Aluminum cap on 1" x 36" Iron Pipe with 3 1/4" 'Grand Trav. Co. Remon.' Brass cap on 2 1/2" x 30" Galv. Iron Pipe, in ring of stones, down 0.7'.
 Placed 1/2" stone inverted on N side base of pipe as memorial.
 North 33' set blue carsonite post with location tag next to Cedar post
- | | | |
|---------------|-------------------------|----------------------------------|
| N53°W 59.42' | to fnd.nail in SW. side | 14" Red Pine (CFR) |
| N54°E 57.01' | to fnd.nail in SE. side | 7" Twin White Pine (CFR) |
| S25°E 25.68' | to fnd.nail in W. side | 38" Sugar Maple(KJO, WB, CFR) |
| S52°W 90.04' | to fnd.nail in NW. side | 8" Red Oak (CFR) |
| S36°W 110.04' | to NE. corner | block Foundation Log house #4143 |

Signed by: Craig W. McVean
 Surveyor's Michigan License No.: 39088

Date: 1/3/2000

