


LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. PA 1970

For Corners In: Kalkaska (County)	Located In	Corner Code #	
1. Public Land Survey	T <u>27N</u> R <u>8W</u>	<u>C9</u>	
	T _____ R _____	_____	
2. Property Controlling in Section	S _____ T _____ R _____	_____	
	S _____ T _____ R _____	_____	
3. Miscellaneous Property in Section	S _____ T _____ R _____	_____	
	S _____ T _____ R _____	_____	

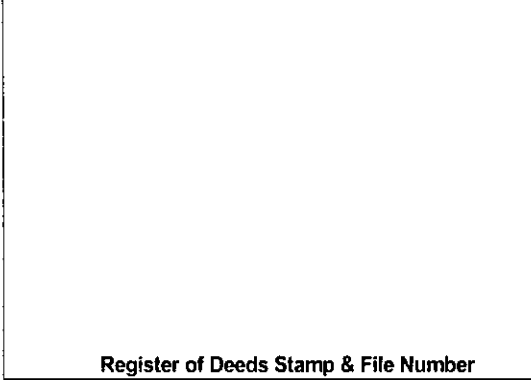

4. Lot No: _____ Recorded Plat: _____

5. Private Claims: _____

I, Craig W. McVean, in a field survey on May 28, 2002 do hereby state that under requirements of PA 74, Michigan PA of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2	6		5		4		3		2		1		
3													
4	7		8		9		10		11		12		
5													
6	18		17		16		15		14		13		
7													
8	19		20		21		22		23		24		
9													
10	30		29		28		27		26		25		
11													
12	31		32		33		34		35		36		
13													

A. Description of original monument and accessories and/or subsequent restoration:

- | | |
|--|--|
| <p><u>C9</u> – GLO – set post – L. Lyon – 1850
Cedar 8" N74°E 25 L.
Tamarack 12" S45°W 30 L.</p> <p>- M. Schaaf – 1928 – S. between Sec. 19 & 20.
Intersected Sec. line 154' East of post in swamp. Chain was 56'9" long.</p> <p>- DNR corner record – 1967 – K.J. Ostling
Set cons. Dept. mon. on line over ¼ and section corner east at double distance therefrom. This conforms to swamp edges E, W & S. Falls in line with firelane S. & checks measurement by Schaaf to Sec. Cor. N. Could not locate anything for a previous corner.</p> | <p>- LCRC L. 1, P. 321 – J.L. Fletcher - 1974
DNR Disc; nail in 10" Poplar N16°E 62.85'; nail in 8" Poplar S64°W 43.88'; nail in 6" Cherry South 28.40'.</p> <p>- LCRC L. 3, P. 28 – M.D. Mileski – 1993
Fd. DNR iron pipe & disk in agreement w/ probable (NE) US BT stp. and in reasonable agreement w/ Gov't swamp call to the West. Same wit. as Fletcher.</p> |
|--|--|

B. Description of corner evidence found and/or method applies in restoring or re-establishing corner:

C9 – Sec. corner common to Sec. 19, 20, 29 & 30 - Could find no evidence of DOC Mon. or witnesses noted by Fletcher or Mileski. Also searched area for any other evidence of a corner but found nothing. Someone had obviously removed the DOC (DNR) monument from the swamp. Set 4" DNR Alum. Cap on 1" x 5' long galv. iron pipe from Traverse points per Mileski's notes at Mitchell & Assoc. Office. Measured East 99' (GLO) ± 30' to edge of swamp. Measured N 99' ± 10' (77' GLO) & S 45' ± 10' (88' –GLO) to edge of swamp. DNR Mon. accepted as the best available evidence of the position of the original corner.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

C9 – 4" DNR Alum. cap on 1" x 5' long Galv. iron pipe. Add ring of stones.
N 1' to set blue carsonite post.
N84°W 43.04' to set N&T in N side 9" Ash scribed 'XBT'
S16°W 88.55' to set N & T in W side 8" W. Pine scribed 'XBT'
S4°E 89.94' to set N & T in E side 12" Oak scribed 'XBT'
S86°E 98.01' to set N & T in N side 6" B. Fir scribed 'XBT'



Signed by: Craig W. McVean
Surveyor's Michigan License No.: 39088

Date: 12/9/2003