

87.00 REMONUMENTATION
\$2.00

FEB 14 1997

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970


KENT COUNTY REMONUMENTATION

For corners in COMMISSION

Corner	County	Located in: Caledonia Township	Corner Code #
1. Public Land Survey	Kent	T <u>5N</u> R <u>10W</u>	<u>M-5</u>
		T _____ R _____	_____
		T _____ R _____	_____
		T _____ R _____	_____
2. Property Controlling in Section		S _____ T _____ R _____	_____
		S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.		S _____ T _____ R _____	_____
		S _____ T _____ R _____	_____

STATE OF MICHIGAN
COUNTY OF KENT
RECEIVED FOR RECORD
96 NOV -8 AM 9:25
REG. OF DEEDS
Jan Standa
9576
Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

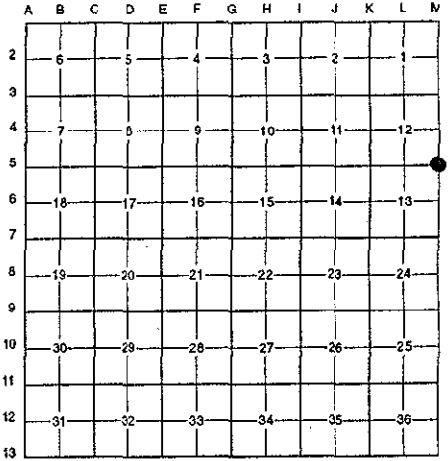

I, Randy Kolehouse, in a field survey on April 9 19 96, do hereby certify that under requirements of P.A. 74 Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

Date	Description	Surveyor	Monument
M-5 1817	G.L.O. Notes	L. Lyon	Set Post
1938	Witness Map	K.C. Surveyor	Monument
1975	L.C.R.C. #844	Medema, Van Kooten & Assoc.	3/4" Round Iron
1977	L.C.R.C. #967	D. Ankrom	3/8" Iron
1976	L.C.R.C. #3375	D. Ankrom	3/8" Iron
1982	L.C.R.C. #3184	Jonker Land Survey	Fnd. 3/4" Rd. Iron / Set K.C. Monument
1995	L.C.R.C. #8156	K. Breitels	K.C. Monument

P.A. 345 1990 KENT COUNTY
PEER APPROVED *10/22/96*
CHAIRMAN *Randy Kolehouse*

Note: This corner is common with A-2, T5N, R9W.

This corner was originally approved by the Kent County Remonumentation Peer Group and monumented by Rob Jonker on 11/22/82 and was recorded per L.C.R.C. #3184.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

M-5 Found a Standard Kent County Monument 1' West of the C/L of Snow Avenue running North and South and 1' South of the C/L of 76th Street running East and West per L.C.R.C.'s #3184 and #8156 as set by R. Jonker in place of a 3/4" rd. iron in top of a 4" x 36" concrete monument 15" below grade surrounded by 4"-6" stones which checked L.C.R.C.'s #3375, #967 and #844 and the K.C. Surveyor's records:

L.C.R.C. #3184

L.C.R.C. #8156

Remon. tag on N side 36" Oak S 80° W 118.38'
Remon. tag on E side p. pole N 20° W 91.34'
Chisled "X" on N end culvert N 70° E 61.53'
Chisled "X" on S end culvert S 70° E 60.46'


Nail & KC Remon. tag N. side 44" Oak S 80° W 118.34'
Nail & KC Remon. tag E. side P. Pole N 20° W 91.34'
Chiseled "X" on N. end culv. N 70° E 61.53'
Chisled "X" on S. end culv. S 70° E 60.51'
Capped Iron - Jonker S 45° W 46.63'

The selected location is accepted by me and is generally accepted by professional surveyors as the best available evidence of the position of the original corner.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

M-5 Standard Kent County Monument

Nail & K.C. remon. tag on N side 44" Oak S 80° W 118.34'
Nail & K.C. remon. tag on E side P. pole N 20° W 91.34'
Chiseled "X" on N end of conc. culvert N 70° E 61.53'
Chiseled "X" on S end of conc. culvert S 70° E 60.51'
Capped iron - Jonker S 45° W 46.63'



Signed by *Randy J. Kolehouse* Date 10/18/96
Surveyor's Michigan License No. 25854