

SURVEY & REMONUMENTATION

FEB 14 1997

COMMISSION LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. P.A. 1970

KENT COUNTY REMONUMENTATION

For corners in


Kent (County)	Located in: Gaines Township	Corner Code #
1 Public Land Survey	T <u>5N</u> R <u>11W</u>	<u>A-4</u>
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2 Property Controlling In Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3 Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____

STATE OF MICHIGAN
 COUNTY OF KENT
 RECEIVED FOR RECORD
 96 AUG -8 AM 8:37
 REG. OF DEEDS
[Signature]

9204

Register of Deeds Stamp & File Number

4 Lot No. _____, Recorded Plat _____
 5 Private Claims _____

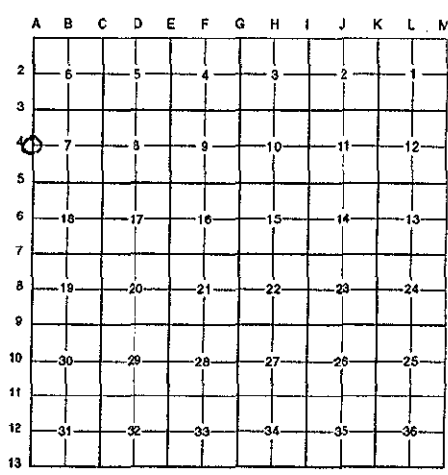

Randy Kolehouse, in a field survey on January 5 19 96, do hereby certify that under requirements of P.A. 74 Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A Description of original monument and accessories and/or subsequent restoration:
 A-4 This corner was not originally set by the G.L.O.
 1966 Witness Map K.C. Surveyor C/L Pavement
 1979 L.C.R.C. #1294 Exxel Engineering Found 1" Iron in Mon. Box
 1980 L.C.R.C. #1534 Exxel Engineering Found 1" Iron in Mon. Box/Set K.C. Monument
 1991 L.C.R.C. #6364 Chris Marschall K.C. Monument

P.A. 345 1990 KENT COUNTY
 PEER APPROVED 3/7/96
 CHAIRMAN *[Signature]*

Note: This corner is common with M-4, T5N, R12W.
 This corner was originally approved by the Kent County Remonumentation Peer Group and monumented by Exxel Engineering on 12/19/80 and was recorded per L.C.R.C. #1534.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:
 A-4 Found standard Kent County Monument at the C/L intersection of Division Street running N-S and 72nd Street running E-W per L.C.R.C.'s #1534 and #6364 as set by Exxel Engineering in place of 1" iron in monument box they found which checked L.C.R.C. #1294 and K.C. Surveyor's records.

L.C.R.C. #1534	L.C.R.C. #6364
¢ of top of hydrant N40°W 61.07'	Centerline of top of hyd. N 40 W 61.05'
Nail & tag in East sde 28" Maple (1' above ground)	Nail & Tag E Sd. 30" Maple N 18 W 105.28'
N18°W 105.28'	Nail & Tag N Sd. U.P. S 75 E 63.94'
	Nail & Tag N Sd. U.P. N 85 W 41.26'

The selected location is accepted by me and is generally accepted by professional surveyors as the best available evidence of the position of the original corner.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:
 A-4 Standard Kent County Monument
 Nail & K.C. remon. tag on NE side P. pole S 70° E 63.95'
 Nail & K.C. remon. tag on NE side 30" Maple N 18° W 105.29'
 C/L top nut hydrant N 40° W 61.08'
 Nail & K.C. remon. tag on N side P. pole N 85° W 41.28'
 Nail & K.C. remon. tag on SE side P. pole S 18° W 142.51'



Signed by Randy J. Kolehouse Date 7/23/96
 EARTH TECH
 Surveyor's Michigan License No. 25854