

SURVEY & REMONUMENTATION
 \$7.00
 \$2.00
 MAR 08 1999

LAND CORNER RECORDATION CERTIFICATE
 Filing Requirement of Act 74, Mich. P.A. 1970
 KENT COUNTY REMONUMENTATION


STATE OF MICHIGAN
 COUNTY OF KENT
 RECEIVED FOR RECORD
 30 OCT 23 AM 9:57
 REG. OF DEEDS
[Signature]

For corners in SECTION

Kent (County)	Located in: Vergennes Township	Corner Code #
1. Public Land Survey	T <u>7N</u> R <u>9W</u>	<u>G-10</u>
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
4. Lot No. _____, Recorded Plat _____		
5. Private Claims _____		

10779

Register of Deeds Stamp & File Number

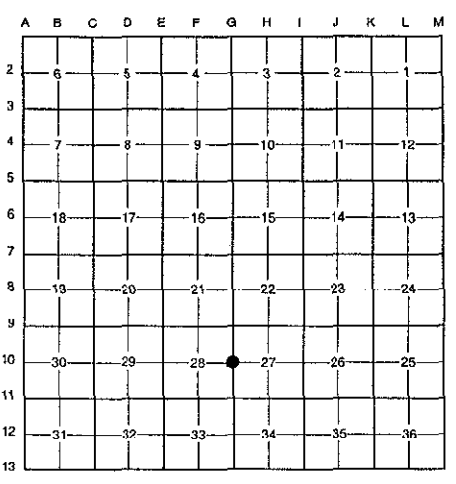

I, Randy Kolehouse, in a field survey on January 6 19 98, do hereby certify that under requirements of P.A. 74 Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

G-10	1838	G.L.O. Notes	N. Brookfield	Set Post
	1959	Witness Map	K.C. Surveyor	Iron
	1972	L.C.R.C. #440	Medema, Van Kooten & Assoc.	"T" Iron
	1981	L.C.R.C. #1944	Jonker Land Survey	Fnd. "T" Iron / Set K.C. Monument
	1991	L.C.R.C. #5793	Exxel Engineering	K.C. Monument

P.A. 345 1990 KENT COUNTY
 PEER APPROVED 2/19/98
 CHAIRMAN [Signature]

This corner was originally approved by the Kent County Remonumentation Peer Group and monumented by Rob Jonker on 8/4/81 and was recorded per L.C.R.C. #1944.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

G-10 Found a Standard Kent County Monument at the C/L of Alden Nash Road (gravel) running North and South per L.C.R.C.'s #1944 and #5793 as set by Rob Jonker in place of a "T" iron he found which checked L.C.R.C. #440 and the K.C. Surveyor's records.

L.C.R.C. #1944

L.C.R.C. #5793


Remon. tag on NW side 16" Oak N71°E 32.80'
 Remon. tag on SW side 16" Oak S30°E 42.47'
 Remon. tag on N side 12" tr.W.Cherry S60°E 21.19'

Nail & remon tag in S side 20" Oak S 88°W 26.30' (m. 26.26')
 Nail & remon tag in NW side 20" Oak N 73°E 32.90'
 Nail & remon tag in N side 14" Tr. Cherry S 64° E 21.42' (m. 21.43')
 Nail & remon tag in SW side 21" Oak S 29° E 42.42' (m. 42.41')

The selected location is accepted by me and is generally accepted by professional surveyors as the best available evidence of the position of the original corner.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

G-10 Standard Kent County Monument
 Nail & K.C. remon. tag on S side 20" Oak S 88° W 26.26'
 Nail & K.C. remon. tag on NW side 20" Oak N 73° E 32.90'
 Nail & K.C. remon. tag on N side 14" Tr. Cherry S 64° E 21.43'
 Nail & K.C. remon. tag on SW side 22" Oak S 29° E 42.41'
 On C/L gravel road running N-S



Signed by Randy J. Kolehouse Date 9-1-98
 EARTH TECH

Surveyor's Michigan License No. 25854