

MAR 03 1998

SECTION

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970
KENT COUNTY REMONUMENTATION

For corners in

Table with columns: Kent (County), Located in: Ada Township, Corner Code #. Rows include Public Land Survey, Property Controlling in Section, and Miscellaneous Property in Sec.


STATE OF MICHIGAN
COUNTY OF KENT
RECORDED FOR RECORD
97 OCT 15 AM 8:50
REG. OF DEEDS

10198

Register of Deeds Stamp & File Number

- 4. Lot No. , Recorded Plat
5. Private Claims

I, Randy Kolehouse, in a field survey on April 1 19 97, do hereby certify that under requirements of P.A. 74 Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

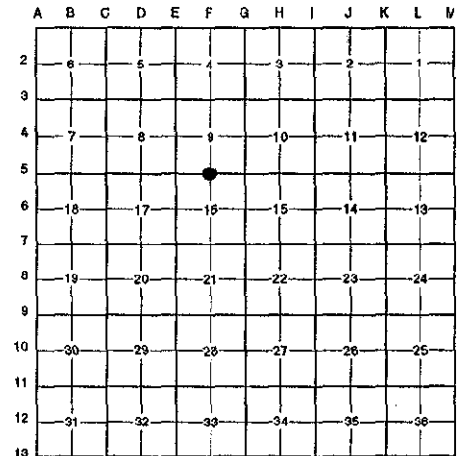

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

Table with columns: F-5, 1831, G.L.O. Notes, Mullett, Set Post, 1962, Witness Map, K.C. Surveyor, 3/4" Iron, 1974, L.C.R.C. #1086, Medema, Van Kooten & Assoc., Pinched Iron, 1982, L.C.R.C. #3149, Moore & Bruggink, Fnd. 1" Pinched Iron / Set K.C. Monument, 1989, L.C.R.C. #5138, T. Chettleburgh, K.C. Monument

P.A. 345 1990 KENT COUNTY
PEER APPROVED 5/22/97
CHAIRMAN Randy Kolehouse

This corner was originally approved by the Kent County Remonumentation Peer Group and monumented by Moore & Bruggink on 6/21/82 and was recorded per L.C.R.C. #3149.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

F-5 Found a damaged Standard Kent County Monument 2.4' South of the C/L of 2 Mile Road (gravel). Reset point per witnesses from L.C.R.C.'s #3149 and #5138 as set in 1982 by Moore & Bruggink per L.C.R.C. #1086 and the Kent County survey records.

L.C.R.C. #3149

L.C.R.C. #5138

K.C. Nail & Cap 24" Hickory South 45.96'
K.C. Nail & Cap 10" Double Ash S 70° W 68.18'
K.C. Nail & Cap 5" Hickory N 60° W 63.61'


K.C. Remon. Tag & Nail NW side Tri. 8" Oak N 47° E 44.23' (m. 44.67')
K.C. Remon. Tag & Nail SW side 13" Hickory S 52° E 26.60' (m. 26.91')
K.C. Remon. Tag & Nail NE side 14" Hickory S 52° E 48.58' (m. 48.91')
K.C. Remon. Tag & Nail East side 21" Hickory S 01° W 45.91' (m. 45.80')
K.C. Remon. Tag & Nail North side Tw. 11" Ash S 70° W 68.10' (m. 67.65')
K.C. Remon. Tag & Nail South side 6" Hickory N 59° W 63.53' (m. 63.22')

The selected location is accepted by me and is generally accepted by professional surveyors as the best available evidence of the position of the original corner.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

F-5 Reset a Standard Kent County Monument

Nail & K.C. remon. tag on NW side Triple 8" Oak N 47° E 44.23'
Nail & K.C. remon. tag on SW side 14" Hickory S 52° E 26.60'
Nail & K.C. remon. tag on NE side 14" Hickory S 52° E 48.58'
Nail & K.C. remon. tag on E side 22" Hickory S 01° W 45.91'
Nail & K.C. remon. tag on N side Twin 12" Ash S 70° W 68.10'
Nail & K.C. remon. tag on S side 6" Hickory N 59° W 63.53'



Signed by Randy J. Kolehouse Date 8-1-97

EARTH TECH

Surveyor's Michigan License No. 25854