

SURVEY & REMONUMENTATION

APR 28 1995

KENT COUNTY REMONUMENTATION

COMMISSIONER

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

STATE OF MICHIGAN
COUNTY OF KENT
RECEIVED FOR RECORD
94 DEC -5 AM 8:52
W. R. Byl
REG. OF DEEDS

For corners in
KENT COUNTY
(County)


Located In:

Corner Code #

- | | | |
|---------------------------------------|--------------------------|-------|
| 1. Public Land Survey | T <u>7N</u> R <u>12W</u> | E-12 |
| | T _____ R _____ | _____ |
| | T _____ R _____ | _____ |
| | T _____ R _____ | _____ |
| 2. Property Controlling in Section | S _____ T _____ R _____ | _____ |
| | S _____ T _____ R _____ | _____ |
| 3. Miscellaneous Property in Sec. | S _____ T _____ R _____ | _____ |
| | S _____ T _____ R _____ | _____ |
| 4. Lot No. _____, Recorded Plat _____ | | |
| 5. Private Claims _____ | | |

7590
Register of Deeds Stamp & File Number

I, William R. Byl in a field survey on May 3, 19 94 do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

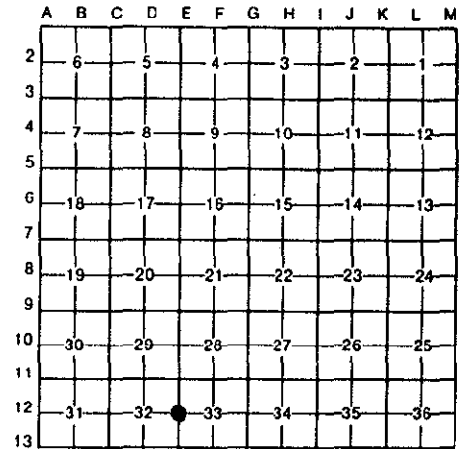

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

- | | | | | |
|------|---------|------------------|----------|--------------------------|
| E-12 | 1837 | GLO | Whitcomb | Set Post |
| | 1900-59 | Williams & Works | | Iron & Stone |
| | 1939 | Kent Co. Wit. | | Iron Pipe |
| | 1983 | LCRC #3465 | Bonnema | 1/2" Iron Pipe |
| | 1985 | LCRC #4042 | Byl | Set Kent County Monument |
| | 1990 | LCRC #5541 | Starr | Kent County Monument |

P.A. 345 1000 KENT COUNTY
PEER APPROVED 12/1/94
CHAIRMAN *Harry Huber*

The position of this corner was previously approved by the Kent County Remonumentation Peer Group, monumented by William R. Byl on 1/14/85 and was recorded per LCRC #4042

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:


E-12 Found standard Kent Co. Mon. (Harrison) per witnesses from above LCRC as set by William R. Byl in place of the Iron he found next to a large stone. Said Iron checks with Williams & Works, Kent Co. Wit. and LCRC #3465

- | | |
|-------------------------------------|------------------------------|
| <u>LCRC #4255</u> | <u>LCRC #5541</u> |
| Nail & tag 6" Maple | N50°W 29.55' |
| Nail & tag Tw. 8" Oak | N00°E 45.13' |
| Nail & tag 18" Oak | N20°E 43.24' |
| Nail & tag 15" Oak | N60°E 29.05' |
| Nail & tag Tw. 12" Oak | S80°E 43.42' |
| Edge of steep bank is Southerly 15' | same witnesses as LCRC #4255 |

The selected location is accepted by me and is generally accepted by professional surveyors as the best available evidence of the position of the original corner.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

- E-12 Standard Kent County Monument
- | | |
|--|--------------|
| Nail & KC Remon. tag S. side 8" Maple | N50°W 29.55' |
| Nail & KC Remon. tag E. side Tw. 10" Oak | N00°E 45.13' |
| Nail & KC Remon. tag W. side 20" Oak | N20°E 43.24' |
| Nail & KC Remon. tag E. side 18" Oak | N60°E 28.95' |
| New Nail & KC Remon. tag S. side Tw. 15" Oak | S80°E 43.42' |
| Edge of steep bank is Southerly 15' | |



Signed by *W. R. Byl* Date 12/7/94
Surveyor's Michigan License No. 23502