

\$7.00  
\$2.00

QUANTITY  
REMONUMENTATION

MAR 06 1999

LAND CORNER RECORDATION CERTIFICATE  
Filing Requirement of Act 74, Mich. P.A. 1970  
KENT COUNTY REMONUMENTATION

For corners in

SECTION

Kent (County)	Located in:	Grattan Township	Corner Code #
1. Public Land Survey	T <u>8N</u>	R <u>9W</u>	<u>E-12</u>
	T _____	R _____	_____
	T _____	R _____	_____
	T _____	R _____	_____
2. Property Controlling in Section	S _____	T _____	R _____
	S _____	T _____	R _____
3. Miscellaneous Property in Sec.	S _____	T _____	R _____
	S _____	T _____	R _____

REG. OF DEEDS

*Lucy Sand*

38 OCT 23 AM 9:59

STATE OF MICHIGAN  
COUNTY OF KENT  
RECEIVED FOR RECORD

10861

Register of Deeds Stamp & File Number

- 4. Lot No. \_\_\_\_\_, Recorded Plat \_\_\_\_\_
- 5. Private Claims \_\_\_\_\_

I, Randy Kolehouse, in a field survey on January 26 19 98, do hereby certify that under requirements of P.A. 74 Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

**NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.**


A. Description of original monument and accessories and/or subsequent restoration:

E-12	1837	G.L.O. Notes	Cathcart	Set Post
	1944	Witness Map	K.C. Surveyor	1" iron
	1977	L.C.R.C. #1230	William Byl	1" Iron
	1980	L.C.R.C. #1396	Williams & Works	1" Iron
	1981	L.C.R.C. #2013	Jonker Land Survey	End. 1" Iron / Set K.C. Monument
	1994	L.C.R.C. #8022	Glaza & Associates	K.C. Monument

P.A. 345 1990 KENT COUNTY

PEER APPROVED 6/29/98

CHAIRMAN *Harriet Huber*

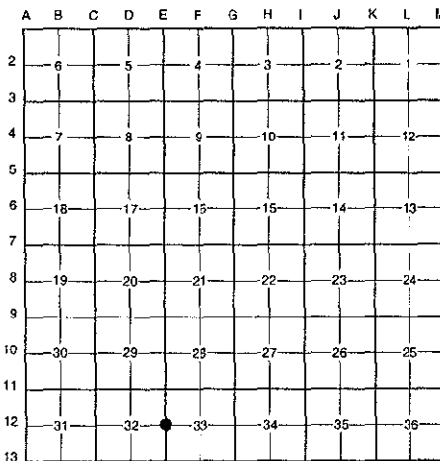

This corner was originally approved by the Kent County Remonumentation Peer Group and monumented by Rob Jonker on 6/15/81 and was recorded per L.C.R.C. #2013.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

E-12 Found a Standard Kent County Monument 1.0' ± East of the C/L of Murray Lake Road (bit.) running North and South per L.C.R.C.'s #2013 and #8022 as set by Rob Jonker in place of a 1" iron he found 3' below grade which checked L.C.R.C.'s #1396, #1230 and the K.C. Surveyor's records.

L.C.R.C. #2013

L.C.R.C. #8022

Remon. tag on E. side 6" Elm N35°W 57.97'  
Remon. tag on NW side 22" Oak S53°W 38.28'  
Remon. tag on SE side p.pole N53°E 143.47'

K.C. remon tag & nail in NW side 14" Elm N35°W 58.25' (m. 58.26')  
K.C. remon tag & nail in NW side 24" Oak S53°W 38.26' (m. 38.24')  
K.C. remon tag & nail in SE side P. pole N53°E 143.47' (m. 143.50')

The selected location is accepted by me and is generally accepted by professional surveyors as the best available evidence of the position of the original corner.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

E-12 Standard Kent County Monument

- Nail & K.C. remon. tag on NE side 14" Elm N 35° W 58.26'
- Nail & K.C. remon. tag on NW side 24" Oak N 53°W 38.24'
- Nail & K.C. remon. tag on SE side P. pole N 53° E 143.50'
- Nail & K.C. remon. tag on NW side 14" Elm S 23° W 138.28'
- C/L of bit. road running N-S, West 1.0' ±

Signed by *Randy J. Kolehouse*

Date 9-1-98

Surveyor's Michigan License No. 25854

