

\$7.00
\$2.00
MAR 08 1999

SECTION

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970
KENT COUNTY REMONUMENTATION

For corners in

Kent (County)	Located in:	Grattan Township	Corner Code #
1. Public Land Survey	T <u>8N</u> R <u>9W</u>		<u>K-12</u>
	T _____ R _____		_____
	T _____ R _____		_____
	T _____ R _____		_____
2. Property Controlling in Section	S _____ T _____ R _____		_____
	S _____ T _____ R _____		_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____		_____
	S _____ T _____ R _____		_____

4. Lot No. _____, Recorded Plat _____
 5. Private Claims _____

I, Randy Kolehouse, in a field survey on February 5 19 98, do hereby certify that under requirements of P.A. 74 Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

K-12	1837	G.L.O. Notes	Cathcart	Set Post
	1939	Witness Map	K.C. Surveyor	Concrete Monument
	1978	L.C.R.C. #1134	Medema, Van Kooten & Assoc.	Concrete Monument
	1981	L.C.R.C. #2023	Jonker Land Survey	Fnd. Plat Monument / Set K.C. Monument
	1991	L.C.R.C. #5896	William Byl	Reset K.C. Monument

This corner was originally approved by the Kent County Remonumentation Peer Group and monumented by Rob Jonker on 6/17/81 and was recorded per L.C.R.C. #2023.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

K-12 Found a Standard Kent County Monument 5' West of the C/L of Ashley Avenue (gravel) running North and South, on line of a tree row running West, per L.C.R.C.'s #2023 and #5896 as set by Rob Jonker in place of a 4" x 15" plat monument he found which checked L.C.R.C. #1134 and the K.C. Surveyor's records.

L.C.R.C. #2023

Remon. tag on SW side 10" Hickory N32°W 38.50'
 Remon. tag on E side 22" Basswood S17°W 77.68'
 Remon. tag on E side 8" Basswood S27°E 53.57'
 C/L N-S gravel E. 5'

L.C.R.C. #5896


Nail & KC Remon. tag SW side 10" Hickory N32°W 38.34'
 Nail & KC Remon. tag E. side 22" Basswood S17°W 77.68'
 Nail & KC Remon. tag NW side 14" Elm S55°W 26.43'
 Nail & KC Remon. tag W. side 12" Hickory N15°W 60.04'
 Nail & KC Remon. tag S. side 9" Stump S85°E 24.09'

The selected location is accepted by me and is generally accepted by professional surveyors as the best available evidence of the position of the original corner.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

K-12 Standard Kent County Monument


Nail & K.C. remon. tag on SW side 10" Hickory N 32° W 38.34'
 Nail & K.C. remon. tag on E side 22" Basswood S 17° W 77.68'
 Nail & K.C. remon. tag on NW side 14" Elm S 55° W 26.43'
 Nail & K.C. remon. tag on W side 12" Hickory N 15° W 60.04'
 Nail & K.C. remon. tag on SE side 8" Poplar N 45° E 40.82'
 Nail & K.C. remon. tag on S side 10" stump S 85° E 24.09'
 C/L of gravel road running N-S, East 5'
 On tree row running W



Signed by Randy J. Kolehouse Date 9-30-98

Surveyor's Michigan License No. 25854

STATE OF MICHIGAN
 COUNTY OF KENT
 RECEIVED FOR RECORD
 38 DEC 14 AM 8:00
 REG. OF DEEDS
 10999
 Register of Deeds Stamp & File Number

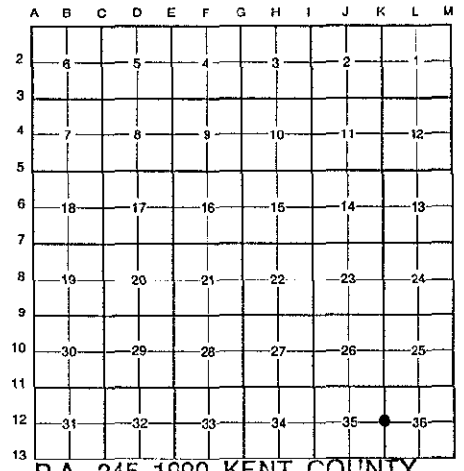

P.A. 345 1990 KENT COUNTY

PEER APPROVED 12/24/98
 CHAIRMAN Randy Kolehouse