

SURVEY & REMONUMENTATION

MAR 03 1998

\$7.00
\$2.00

LAND CORNER RECORDATION CERTIFICATE Filing Requirement of Act 74, Mich. P.A. 1970 KENT COUNTY REMONUMENTATION

For corners in

SECTION


Kent <small>(County)</small>	Located in: Cannon Township	Corner Code #	
1. Public Land Survey	T <u>8N</u> R <u>10W</u>	<u>D-6</u>	
	T _____ R _____	_____	
	T _____ R _____	_____	
	T _____ R _____	_____	
2. Property Controlling in Section	S _____ T _____ R _____	_____	
	S _____ T _____ R _____	_____	
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____	
	S _____ T _____ R _____	_____	

REG. OF DEEDS
 97 DEC 15 AM 10:43
 STATE OF MICHIGAN
 COUNTY OF KENT
 RECEIVED FOR RECORD

10390

Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

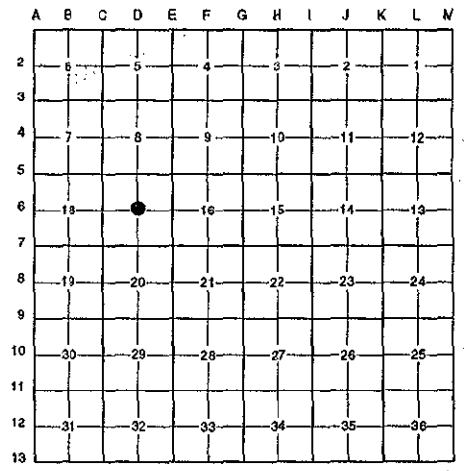

I, Randy Kolehouse, in a field survey on November 18 19 97, do hereby certify that under requirements of P.A. 74 Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.


A. Description of original monument and accessories and/or subsequent restoration:
 D-6 This corner was not originally set by the G.L.O.
 Found no additional information on record. Also checked Kent County Surveyor's witness map and found no information pertaining to this corner.

P.A. 345 1990 KENT COUNTY
 PEER APPROVED 10/30/97
 CHAIRMAN [Signature]

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:
 D-6 Found an "All-Points" iron on line of a fence line running North and South. No information on record for this iron. Iron is 0.6' South and 0.6' East of the intersection of 1/4 lines. Accepted iron as Center of Section.

The selected location is accepted by me and is generally accepted by professional surveyors as the best available evidence of the position of the original corner.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:
 D-6 Replaced Iron with a Standard Kent County Monument
 Nail & K.C. remon. tag on SE side 14" Oak S 45° W 22.28'
 Nail & K.C. remon. tag on S side 16" Oak N 40° W 23.92'
 Nail & K.C. remon. tag on S side 10" Oak S 30° E 21.84'
 Nail & K.C. remon. tag on SE side 12" Oak N 60° E 29.33'



Signed by [Signature]
 EARTH TECH
 Surveyor's Michigan License No. 25854

Date 11/24/97