

SURVEY & REMONUMENTATION

MAR 03 1998

LAND CORNER RECORDATION CERTIFICATE Filing Requirement of Act 74, Mich. P.A. 1970 KENT COUNTY REMONUMENTATION

STATE OF MICHIGAN
 COUNTY OF KENT
 RECEIVED FOR RECORD
 97 OCT 15 AM 8:44
 REG. OF DEEDS
Luci Spaul


For corners in **SECTION**

Kent (County)	Located in: Cannon Township	Corner Code #
1. Public Land Survey	T <u>8N</u> R <u>10W</u>	<u>E-1</u>
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
4. Lot No. _____, Recorded Plat _____		
5. Private Claims _____		

10098

Register of Deeds Stamp & File Number

I, Randy Kolehouse, in a field survey on June 12 19 97, do hereby certify that under requirements of P.A. 74 Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

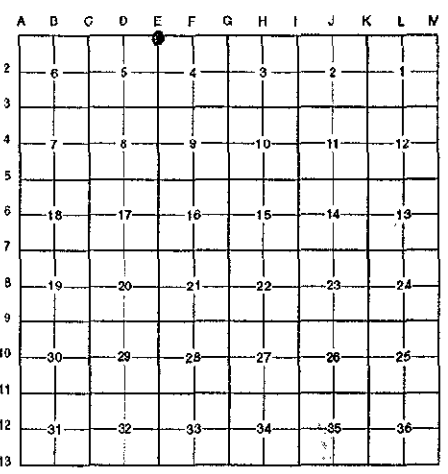

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

E-1	1831 G.L.O. Notes	Mullett	Set Post	
	1960-73 Notes	Williams & Works	PK Nail	
	1975 L.C.R.C. #3289	Glaza & Associates	N/A	
	1984 L.C.R.C. #4044	William Byl	Fnd. Iron / Set K.C. Monument	
	1988 L.C.R.C. #4842	J. Bueche	K.C. Monument	

P.A. 345 1990 KENT COUNTY
PEER APPROVED 6/26/97
CHAIRMAN *Harry Huber*

Note: This corner is not common with E-13, T9N, R10W.

This corner was originally approved by the Kent County Remonumentation Peer Group and monumented by William Byl on 12/3/84 and was recorded per L.C.R.C. #4044.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

E-1 Found a Standard Kent County Monument on the Township line 2' South of the C/L of 10 Mile Road (bit.) running East and West per L.C.R.C.'s #4044 and #4842 as set by William Byl 137.28' East of Kent County Monument at SW corner of Section 33 and on the South line of Section 33 (E-13, T9N, R10W). Corner as set was 0.8' North and 0.3' West of iron he found 4" below road surface.

L.C.R.C. #4044

- Nail & tag, E sd. MBT pole S 20 E 35.60'
- Nail & tag, S sd. 36" Walnut N 75 E 119.60'
- Nail & tag, W sd. fence post N 10 W 50.70'
- "X" cut in top of E end 18" culvert N 60 W 121.12'
- C/L 10 Mile Rd. N 00 E 4'+
- Kent County Monument at SW cor. Sec. 33, 9-10 West 137.28'

L.C.R.C. #4842


- Nail & tag E sde MBT pole S 20 E 35.60' (m. 35.63')
- Nail & tag S sde 38" Walnut N 75 E 119.60'
- Nail & tag W sde fence post N 10 W 50.70'
- "X" cut on top of E end 18" culvt. N 60 W 121.12' (m. 121.18')
- C/L 10 Mile Rd N 0 E 4' M/L
- K.C. Mon at SW cor sec 33, 9-10 W 137.28'

The selected location is accepted by me and is generally accepted by professional surveyors as the best available evidence of the position of the original corner.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

E-1 Standard Kent County Monument

- Nail & K.C. remon. tag on E side MBT pole S 20° E 35.63'
- Nail & K.C. remon. tag on S side 36" Walnut N 75° E 119.60'
- Nail & K.C. remon. tag on W side fence post N 10° W 50.70'
- "X" cut on top E end 18" culvert N 60° W 121.18'
- K.C. Mon., E-13, T9N, R10W, West 137.28'



Signed by *Randy J. Kolehouse* Date 8/12/97
 EARTH TECH

Surveyor's Michigan License No. 25854