

SURVEY & REMONUMENTATION

MAR 03 1998

LAND CORNER RECORDATION CERTIFICATE Filing Requirement of Act 74, Mich. P.A. 1970 KENT COUNTY REMONUMENTATION

STATE OF MICHIGAN
COUNTY OF KENT
RECEIVED FOR RECORD
97 OCT 15 AM 8:45
REG. OF DEEDS
[Signature]

SECTION


For corners in	Located in:	Corner Code #
<u>Kent</u> (County)	Cannon Township	
1. Public Land Survey	T <u>8N</u> R <u>10W</u>	<u>F-11</u>
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____

10113

Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

I, Randy Kolehouse, in a field survey on June 12 19 97, do hereby certify that under requirements of P.A. 74 Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

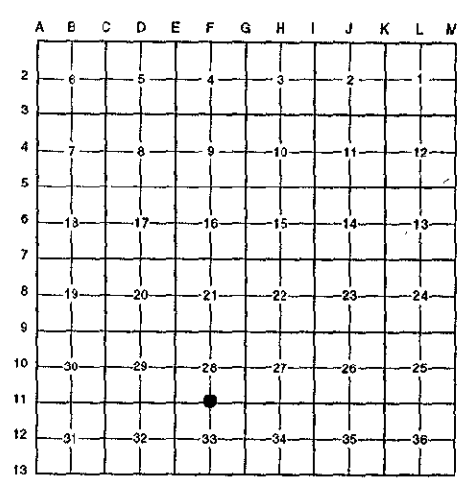

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A.	Description of original monument and accessories and/or subsequent restoration:
F-11 1831	G.L.O. Notes Mullett Set Post
N/A	Witness Map K.C. Surveyor Iron
1981	L.C.R.C. #2319 Nederveld & Jonker Solid Rod
1982	L.C.R.C. #2971 Williams & Works Fnd. Solid Iron / Set K.C. Monument
1991	L.C.R.C. #6307 Chris Marschall K.C. Monument

P.A. 345 1990 KENT COUNTY
PEER APPROVED 6/26/97
CHAIRMAN [Signature]

This corner was originally approved by the Kent County Remonumentation Peer Group and monumented by Williams & Works on 7/1/82 and was recorded per L.C.R.C. #2971.

- B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:
F-11 Found a Standard Kent County Monument 26' South of the C/L of 5 Mile Road (bit.) running East and West per L.C.R.C.'s #2971 and #6307 as set by Williams & Works in place of a solid iron they found which checked L.C.R.C. #2319 and the K.C. Surveyor's records.

L.C.R.C. #2971

L.C.R.C. #6307


- Nail & KC Remon tag in S side 8" Oak East 19.22'
- Nail & KC Remon tag in S side 12" Oak S 75°E 45.06'
- Nail & KC Remon tag in W side 8" Oak S 40°E 31.64'
- Nail & KC Remon tag in W side 8" Oak South 18.83'
- Nail & KC Remon tag in E side 8" Wild Cherry S 85°W 14.00'
- Centerline of road running East & West is 26' North of Corner

- Nail & Tag S sd. Tw. 12"-8" Oak East 19.22'
- Nail & Tag W sd. 12" Oak S 40 E 31.58'
- Nail & Tag W sd. 10" Oak South 18.89'
- Nail & Tag S sd. 10" W. Cherry S 85 W 14.02'
- Nail & Tag S sd. 14" Oak S 75 E 45.08'
- C/L of Rd. E-W is more or less 26' N. of corner

The selected location is accepted by me and is generally accepted by professional surveyors as the best available evidence of the position of the original corner.

- C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

- F-11 Standard Kent County Monument
- Nail & K.C. remon. tag on S side 12"-8" Oak East 19.22'
 - Nail & K.C. remon. tag on W side 12" Oak S 40° E 31.58'
 - Nail & K.C. remon. tag on W side 10" Oak South 18.89'
 - Nail & K.C. remon. tag on S side 10" Wild Cherry S 85° W 14.02'
 - Nail & K.C. remon. tag on S side 14" Oak S 75° E 45.08'



Signed by Randy J. Kolehouse
EARTH TECH

Date 9/12/97

Surveyor's Michigan License No. 25854