

MAY 22 2000

\$7.00
\$2.00

SECTION

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970
KENT COUNTY REMONUMENTATION

For corners in


Kent (County)	Located in: Oakfield Township	Corner Code #
1. Public Land Survey	T <u>9N</u> R <u>9W</u>	<u>K-1</u>
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____

STATE OF MICHIGAN
COUNTY OF KENT
RECEIVED FOR RECORD
1999 DEC - 8 AM 10:10
REG. OF DEEDS

11569

Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

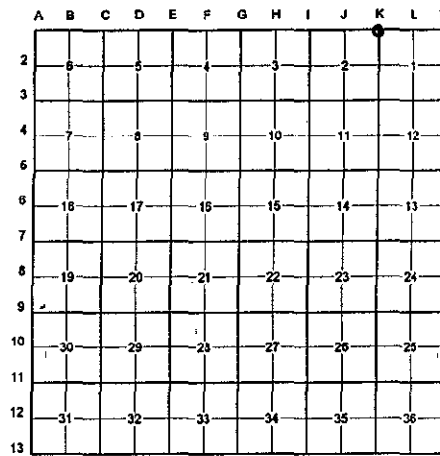

I, Randy Kolehouse, in a field survey on September 27 19 99, do hereby certify that under requirements of P.A. 74 Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

K-1	1837	G.L.O. Notes	Cathcart	Set Post
	1938	Witness Map	K.C. Surveyor	Iron
	1984	L.C.R.C. #4007	John Bueche	Fnd. PK Nail / Set K.C. Monument
	1989	L.C.R.C. #5072	John Bueche	K.C. Monument
	1997	L.C.R.C. #9985	Kirk Breitels	K.C. Monument

P.A. 345 1990 KENT COUNTY
PEER APPROVED 10/29/99
CHAIRMAN Randy Kolehouse

Note: This corner is not common with K-13, T10N, R9W.

This corner was originally approved by the Kent County Remonumentation Peer Group and monumented by John Bueche on 10/11/84 and was recorded per L.C.R.C. #5072.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

K-1 Found a Standard Kent County Monument on the C/L of 16 Mile Road (bit.) running East and West per L.C.R.C.'s #5072 and #9985 as set by John Bueche in place of a PK nail, a 3/4" x 18" iron down .5' ±, and a 1/2" iron and stone down 2.0' ± which checked L.C.R.C. #4007 and the K.C. Surveyor's records.

L.C.R.C. #4007

L.C.R.C. #9985

- K.C. Remon. tag & nail in S. side power pole S 50° E 40.00'
- K.C. Remon. tag & nail in E. side 14" Pine S 15° E 39.41'
- K.C. Remon. tag & nail in E. side 14" Poplar S 35° W 40.45'
- K.C. Remon. tag & nail in W. side 24" Oak N 05° E 45.75'
- K.C. Remon. tag & nail in W. side 10" Oak N 45° E 54.70'
- K.C. Remon. tag & nail in W. side 12" Oak N 60° E 86.96'


- Nail & KC Remon. tag S. side P. Pole S50°E 40.00' (m. 39.86')
- Nail & KC Remon. tag E. side 20" Pine S15°E 39.48' (m. 39.50')
- Nail & KC Remon. tag E. side 20" Poplar S35°W 40.45' (m. 40.43')
- Nail & KC Remon. tag W. side 30" Oak N05°E 45.73' (m. 45.60')
- Nail & KC Remon. tag W. side 14" Oak N45°E 54.70' (m. 54.63')
- Nail & KC Remon. tag W. side 18" Oak N60°E 86.85' (m. 86.89')
- K.C. Mon., K-13, T10N, R9W East 40.98'

The selected location is accepted by me and is generally accepted by professional surveyors as the best available evidence of the position of the original corner.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

K-1 Standard Kent County Monument

- Nail & K.C. remon. tag on S side P. pole S 50° E 39.86'
- Nail & K.C. remon. tag on E side 20" Pine S 15° E 39.50'
- Nail & K.C. remon. tag on E side 20" Poplar S 35° W 40.43'
- Nail & K.C. remon. tag on W side 14" Oak N 45° E 54.63'
- Nail & K.C. remon. tag on W side 18" Oak N 60° E 86.89'
- On C/L of bit. road running E-W
- K.C. Mon., K-13, T10N, R9W, East 40.98'



Signed by Randy J. Kolehouse Date _____

WILLIAMS & WORKS

Surveyor's Michigan License No. 25854