

MAY 22 2000

\$7.00
\$2.00

SECTION

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970
KENT COUNTY REMONUMENTATION

For corners in

Kent (County)	Located in:	Courtland Township	Corner Code #
1. Public Land Survey	T <u>9N</u>	R <u>10W</u>	<u>C-8</u>
	T _____	R _____	_____
	T _____	R _____	_____
	T _____	R _____	_____
2. Property Controlling in Section	S _____	T _____	R _____
	S _____	T _____	R _____
3. Miscellaneous Property in Sec.	S _____	T _____	R _____
	S _____	T _____	R _____

REG. OF DEEDS

[Signature]


STATE OF MICHIGAN
COUNTY OF KENT
RECEIVED FOR RECORD
1999 OCT 15 AM 8:03

11283

Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

I, Randy Kolehouse, in a field survey on January 8 19 99, do hereby certify that under requirements of P.A. 74 Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

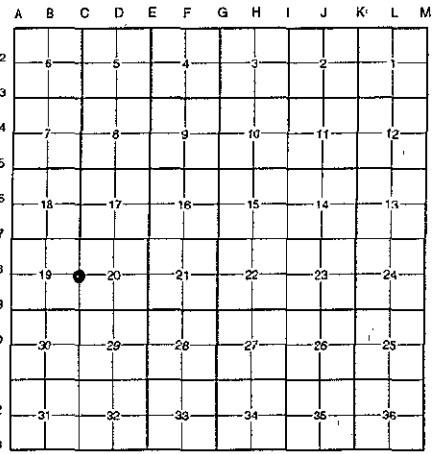

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

C-8	1837	G.L.O. Notes	Cathcart	Set Post
	1977	L.C.R.C. #1095	Medema, Van Kooten & Assoc.	"T" Iron
	1980	L.C.R.C. #1335	William Byl	"T" Iron
	1982	L.C.R.C. #2972	Jonker Land Survey	Fnd. "T" Iron / Set K.C. Monument
	1988	L.C.R.C. #4803	John Bueche	K.C. Monument
	1991	L.C.R.C. #5775	John Bueche	K.C. Monument

P.A. 345 1990 KENT COUNTY
PEER APPROVED 2/25/99
CHAIRMAN *[Signature]*

This corner was originally approved by the Kent County Remonumentation Peer Group and monumented by Rob Jonker on 7/1/82 and was recorded per L.C.R.C. #2972.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

C-8 Found a Standard Kent County Monument on the C/L of Courtland Avenue (bit.) running North and South, on line of a tree row running West, per L.C.R.C.'s #2972, #4803, and #5775 as set by Rob Jonker in place of a "T" iron he found which checked L.C.R.C.'s 1335 and #1095.

L.C.R.C. #2972

L.C.R.C. #5775

Remon. tag on S side p.pole West 94.96'
Remon. tag on W side p.pole N20°E 102.45'
Remon. tag on N side 30" Tw.Oak S85°E 48.0'
On tree line to West.

Nail & remon. tag in S side P. Pole W 95.21' (m. 95.22')
Nail & remon. tag on W side P. Pole N 20° E 102.45' (m. 102.38')
Nail & remon. tag on N side 32" Tw. Oak S 85° E 48.00' (m. 47.92')
Caped iron W 33.00' (m. 32.60')
Cut nail in SE side 10" Pine N 50° E 49.54' (m. 49.51')
On C/L blacktop N-S
On tree line to West

The selected location is accepted by me and is generally accepted by professional surveyors as the best available evidence of the position of the original corner.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

C-8 Standard Kent County Monument

Nail & K.C. remon. tag on S side P. pole West 95.22'	M.V.K. capped iron West 32.60'
Nail & K.C. remon. tag on W side P. pole N 20° E 102.38'	On C/L of bit. road running N-S
Nail & K.C. remon. tag on N side 32" twin Oak S 85° E 47.92'	On tree row runing W
Nail & K.C. remon. tag on SE side 10" Pine N 50° E 49.51'	
M.B.T. box West 32.80'	

Signed by *[Signature]*
EARTH TECH

Date 3/30/99

Surveyor's Michigan License No. 25854

