

MAR 08 1999

\$7.00
\$2.00

SECTION KENT COUNTY REMONUMENTATION

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

For corners in

KENT COUNTY (County)	Located In:	Corner Code #
1. Public Land Survey	T 9N R 12W	D-3
	T R	
	T R	
	T R	
2. Property Controlling in Section	S T R	
	S T R	
3. Miscellaneous Property in Sec.	S T R	
	S T R	

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____


I, Kirk Breitels, in a field survey on Jan. 26, 1998 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

STATE OF MICHIGAN
COUNTY OF KENT
RECEIVED FOR RECORD
98 MAR -5 AM 8:28
REG. OF DEEDS
Lucy Bond

10442

Register of Deeds Stamp & File Number

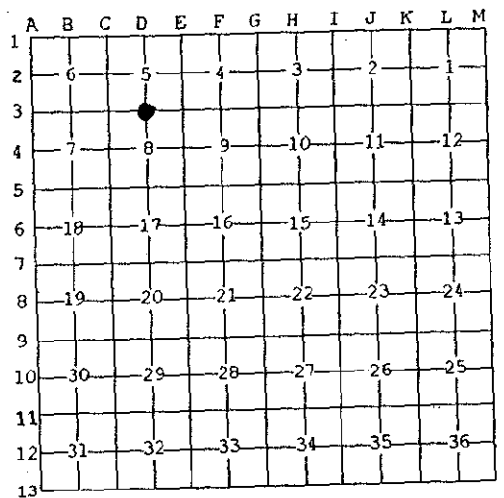

A. Description of original monument and accessories and/or subsequent restoration:

D-3	1837 GLO	Whitcomb	Set Post
	1940 Kent Co. Wits		Iron
	1980 LCRC #1364	E. Glaza	1" Iron in Mon. Box
	1982 LCRC #2942	Merdzinski	Set Kent County Monument in Mon. Box
	1991 LCRC #6145	Byl	Kent County Monument in Mon. Box

P.A. 345 1990 KENT COUNTY
PEER APPROVED 2/19/98
CHAIRMAN Harry Huber

The position of this corner was previously approved by the Kent County Remonumentation Peer Group, monumented by John A. Merdzinski on 4-13-82 and was recorded per LCRC #2942.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

D-3 Found Kent County Monument (Harrison) per witnesses from above LCRC as set by John A. Merdzinski in place of the 1/2" Iron Pipe he found inside a Mon. Box. Said Iron Pipe checks with LCRC #1364. Kent Co. Wits. all gone.

LCRC #2942				LCRC #6145			
"X" cut S. end conc. culv.	S72°W	75.08'	"X" cut S. end conc. culv.	S72°W	75.08'		
"X" cut N. end conc. culv.	N56°W	75.40'	"X" cut N. end conc. culv.	N56°W	75.40'		
Nail & Remon. tag in curb joint	N35°E	45.81'	Nail & Remon. tag in curb joint	N35°E	45.80'		
Nail & Remon. tag 8" Apple	S35°W	85.60'	Nail & Remon. tag in curb joint	N35°W	48.07'		

In C/L 15 Mile Rd. and Wegal Ave.

The selected location is accepted by me and is generally accepted by professional surveyors as the best available evidence of the position of the original corner.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

D-3 Standard Kent County Monument			
"X" cut on S. end 18" conc. culvert	S72°W	75.08'	
"X" cut on N. end 18" conc. culvert	N56°W	75.40'	
Set PK Nail in curb joint	N35°E	45.80'	
Set PK Nail in curb joint	N35°W	48.04'	



Signed by

Kirk Breitels

Date

2/19/98

Surveyor's Michigan License No.

30077