

MAR 08 1999

KENT COUNTY REMONUMENTATION

\$7.00
\$2.00

SECTION

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

STATE OF MICHIGAN
COUNTY OF KENT
RECEIVED FOR RECORD
98 MAR -5 AM 8:29
REG. OF DEEDS
Lucy Storch

For corners in

KENT COUNTY
(County)

Located In:

Corner Code #

- 1. Public Land Survey T 9N R 12W F-5
- T R _____
- T R _____
- T R _____
- T R _____
- 2. Property Controlling S T R _____
- in Section S T R _____
- 3. Miscellaneous S T R _____
- Property in Sec. S T R _____


10453

Register of Deeds Stamp & File Number

- 4. Lot No. _____, Recorded Plat _____
- 5. Private Claims _____

I, Kirk Breiteis, in a field survey on Jan. 22, 1998 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law, established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

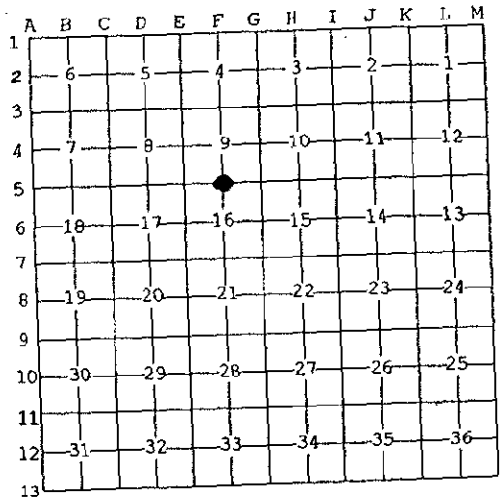

A. Description of original monument and accessories and/or subsequent restoration:

- F-5 1837 GLO Whitcomb Set Post
- 1935 Kent Co. Wits Stone on fence line
- 1981 LCRC #3200 Nederveld "T" Iron
- 1983 LCRC #3381 Stadt Set Kent County Monument
- 1991 LCRC #6164 Byl Kent County Monument

P.A. 345 1990 KENT COUNTY
PEER APPROVED 2/19/98
CHAIRMAN Harry Huber

The position of this corner was previously approved by the Kent County Remonumentation Peer Group, monumented by Russell E. Stadt on 5-16-83 and was recorded per LCRC #3381.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

- F-5 Found Kent County Monument (Harrison) per witnesses from above LCRC as set by Russell E. Stadt in place of the "T" Iron he found. Said "T" Iron checks with Kent Co. Wits. and LCRC #3200.
- LCRC #3381
- Nail & Remon. tag 36" Maple N50°W 45.67' Nail & Remon. tag 36" Maple N50°W 45.67'
- Nail & Remon. tag 30" Maple S75°E 109.03' Nail & Remon. tag 30" Maple S75°E 109.30'
- Nail & Remon. tag P. Pole N05°E 75.75' Nail & Remon. tag P. Pole N05°E 75.75'
- SW cor. power tower at grd. level N55°E 57.40' SW leg power tower at grd. level N55°E 57.40'
- On fence line N.
- C/L E-W road is 3.5' South ±

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

- F-5 Standard Kent County Monument
- Nail & KC Remon. tag S. side 36" Maple N50°W 45.67'
- Nail & KC Remon. tag N. side 30" Maple S75°E 109.30'
- Nail & KC Remon. tag E. side P. Pole N05°E 75.75'
- SW leg power tower at ground level N55°E 57.40'



Signed by *Kirk Breiteis*
Surveyor's Michigan License No. 30077

Date 2/19/98