

MAY 22 2000

KENT COUNTY REMONUMENTATION

SECTION LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

For corners in

<u>KENT COUNTY</u> (County)	Located In:	Corner Code #
1. Public Land Survey	T <u>10N</u> R <u>11W</u>	<u>I-5</u>
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____

REG. OF DEEDS

[Signature]

STATE OF MICHIGAN
COUNTY OF KENT
RECEIVED FOR RECORD
1999 NOV - 4 AM 8:35


11466

Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

I, Kirk Breitels, in a field survey on Aug. 27, 19 99 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

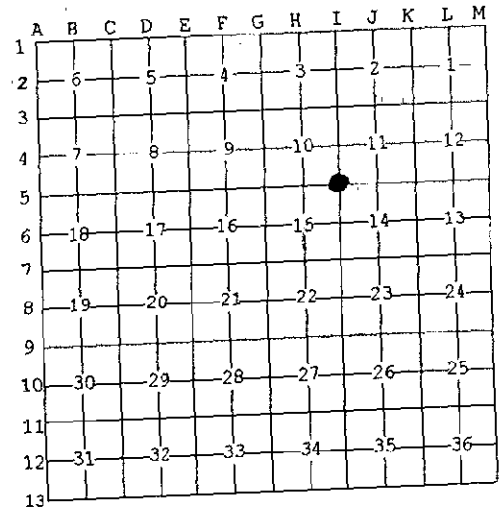

P.A. 345 1990 KENT COUNTY
PEER APPROVED 9/23/99
CHAIRMAN [Signature]

A. Description of original monument and accessories and/or subsequent restoration:

I-5	1837	GLO	Cathcart	Set Post
		Kent Co. Wits		Iron
	1986	LCRC #4404	VanKooten	Reset Iron per wits. (set by Nederveld)
	1991	LCRC #5758	Roosein	Set Kent County Monument

The position of this corner was previously approved by the Kent County Remonumentation Peer Group, monumented by Kevin Roosien on 2-15-91 and was recorded per LCRC #5758.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

I-5 Found Kent County Monument (Harrison) per witnesses from above LCRC as set by Kevin Rooien in place of the Capped Iron (MVK) he found. Said Iron checks with LCRC #4404

Nail & KC Remon. tag E. side 10" Willow	N45°W	1.80'
Nail & KC Remon. tag NE side 10" Willow	N55°W	31.31'
Nail & KC Remon. tag N. side 8" Willow	N85°W	70.62'
Nail & KC Remon. tag W. side 4" Ash	South	10.97'
Nail & KC Remon. tag N. side 4" Willow	N60°E	50.51'
Nail & KC Remon. tag E. side 4" Willow	North	11.61'

The selected location is accepted by me and is generally accepted by professional surveyors as the best available evidence of the position of the original corner.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

I-5 Standard Kent County Monument	N45°W	1.80'
Nail & KC Remon. tag E. side 10" Willow	N55°W	31.31'
Nail & KC Remon. tag NE side 10" Willow	N85°W	70.62'
Nail & KC Remon. tag N. side 8" Willow	South	10.97'
Nail & KC Remon. tag W. side 4" Ash	N60°E	50.51'
Nail & KC Remon. tag N. side 4" Willow	North	11.61'
Nail & KC Remon. tag E. side 4" Willow		



Signed by *[Signature]*
Surveyor's Michigan License No. 30077

Date 10/28/99